

## 5. Environmental Analysis

### 5.16 TRANSPORTATION AND TRAFFIC

This section of the draft environmental impact report (DEIR) evaluates the potential for implementation of the proposed Project to result in transportation and traffic impacts in the City of Long Beach and its sphere of influence (SOI). The analysis in this section is based in part on the following technical report(s):

- *Long Beach Southeast Area Specific Plan Transportation Impact Analysis*, Fehr & Peers, February, 2017. (Appendix J1 of this DEIR)
- *Technical Memorandum: Long Beach Southeast Area Specific Plan Transportation Demand Management Plan*, Fehr & Peers, January 31, 2017. (Appendix J2 of this DEIR)
- *Technical Memorandum: Vehicle Miles Traveled (VMT) for the SEASP Project*, Fehr & Peers, February 14, 2017. (Appendix J3 of this DEIR)

Complete copies of the Transportation Impact Analysis (TIA) and VMT memo are provided in Appendices J1, J2, and J3 of this DEIR.

#### 5.16.1 Environmental Setting

##### 5.16.1.1 REGULATORY SETTING

This section summarizes state and local laws, regulations, plans, or guidelines that are potentially applicable to the proposed Project.

##### State

Caltrans, the California Department of Transportation, is charged with planning and maintaining state routes, highways, and freeways. Caltrans is the owner/operator for Pacific Coast Highway (PCH), I-405, and SR-22 in the study area. Caltrans has developed Transportation Impact Analysis Guidelines for use when assessing state facilities.

##### *Assembly Bill 1358: The California Complete Streets Act*

The California Complete Streets Act (AB 1358) of 2008 was also signed into law on September 30, 2008. Beginning January 1, 2011, AB 1358 requires circulation elements to address the transportation system from a multimodal perspective. The bill states that streets, roads, and highways must “meet the needs of all users in a manner suitable to the rural, suburban, or urban context of the general plan.” Essentially, this bill requires a circulation element to plan for all modes of transportation where appropriate, including walking, biking, car travel, and transit.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

The Complete Streets Act also requires circulation elements to consider the multiple users of the transportation system, including children, adults, seniors, and the disabled. AB 1358 tasks the Governor's Office of Planning and Research (OPR) to release guidelines for compliance, which are so far undeveloped.

### *Sustainable Communities and Climate Protection Act*

The Sustainable Communities and Climate Protection Act of 2008 or Senate Bill (SB) 375 was signed into law on September 30, 2008. The SB 375 regulation provides incentives for cities and developers to bring housing and jobs closer together and to improve public transit. The goal behind SB 375 is to reduce automobile commuting trips and length of automobile trips, thus helping to meet the statewide targets for reducing greenhouse gas emissions set by AB 32.

SB 375 requires each metropolitan planning organization to add a broader vision for growth, called a "Sustainable Communities Strategy" (SCS), to its transportation plan. The SCS must lay out a plan to meet the region's transportation, housing, economic, and environmental needs in a way that enables the area to lower greenhouse gas emissions. The SCS should integrate transportation, land-use, and housing policies to plan for achievement of the emissions target for their region. On April 7, 2016, the Southern California Association of Governments' (SCAG) Regional Council adopted the 2016-2040 Regional Transportation Plan/ Sustainable Communities Strategy (2016 RTP/SCS).

### *Senate Bill 743*

The legislature found that with the adoption of the SB 375, the state had signaled its commitment to encourage land use and transportation planning decisions and investments that reduce vehicle miles traveled (VMT) and thereby contribute to the reduction of greenhouse gas emissions (GHG), as required by the California Global Warming Solutions Act of 2006 (Assembly Bill [AB 32]). Additionally, AB 1358, described above, requires local governments to plan for a balanced, multimodal transportation network that meets the needs of all users.

On September 27, 2013, SB 743 was signed into law. SB 743 started a process that could fundamentally change transportation impact analysis as part of CEQA compliance. These changes will include the elimination of auto delay, level of service (LOS), and other similar measures of vehicular capacity or traffic congestion as a basis for determining significant impacts in many parts of California (if not statewide). As part of the new CEQA Guidelines, the new criteria "shall promote the reduction of greenhouse gas emissions, the development of multimodal transportation networks, and a diversity of land uses" (Public Resources Code Section 21099(b)(1)). OPR is in the process of developing alternative metrics and thresholds based on VMT. OPR has published the final draft of changes to the CEQA Guidelines, which will require certification and adoption by the California Secretary for Natural Resources before they go into effect. This may take several months depending on the input received during the review process. Once the guidelines are prepared and

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

certified, “automobile delay, as described solely by level of service of similar measures of vehicular capacity or traffic congestion, shall not be considered a significant impact on the environment” (Public Resources Code Section 21099(b)(2)). Certification and implementation of the guidelines are expected no earlier than the summer of 2017. Since OPR has not yet amended the CEQA Guidelines to implement this change, automobile delay is still considered a significant impact, and the City of Long Beach will continue to use the established LOS criteria.

### Regional and Local

#### *SCAG's 2016 RTP/SCS*

Every four years, SCAG updates the RTP for the six-county region that includes Los Angeles, San Bernardino, Riverside, Orange, Ventura, and Imperial counties. Current and recent transportation plan goals generally focus on balanced transportation and land use planning that:

- Maximize mobility and accessibility for all people and goods in the region.
- Ensure travel safety and reliability for all people and goods in the region.
- Preserve and ensure a sustainable regional transportation system.
- Maximize the productivity of our transportation system.
- Protect the environment and health of residents by improving air quality and encouraging active transportation (e.g., bicycling and walking).
- Encourage land use and growth patterns that facilitate transit and active transportation.

Though many projects are scheduled through the RTP throughout Long Beach, none of them are in the Project area.

#### *Los Angeles County Metropolitan Transportation Authority*

Los Angeles County Metropolitan Transportation Authority (Metro) serves as transportation planner and coordinator, designer, builder, and operator for Los Angeles County. Metro funds improvements to all modes of transportation through several programs, including the Transportation Improvement Program, the Congestion Management Program, and Bicycle Transportation Strategic Plan. Metro operates rail and bus transit services throughout Los Angeles County, including the City of Long Beach.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

### *Los Angeles County Congestion Management Program*

In 2010 the County of Los Angeles updated its Congestion Management Program (CMP) to assess the overall performance of the highway system, which provides quantitative input for funding improvements and programs. This is the eighth CMP adopted for Los Angeles County since the requirement became effective with the passage of Proposition 111 in 1990. The CMP covers approximately 500 miles of freeway facilities, which are divided into 81 key segment pairs (eastbound/westbound or northbound/southbound). The traffic operations at each segment are evaluated every two years by Caltrans and published in the CMP. The CMP arterial streets in Long Beach consist of PCH, 7th Street, Alamitos Avenue, and Lakewood Boulevard. The CMP freeway segments in Long Beach include I-710, I-605, I-405, and SR-91.

The county's traffic congestion management policy is intended to determine appropriate transportation planning actions in response to a particular level of service (LOS). However, a particular level of service at an intersection does not necessarily preclude additional development at or around that intersection. Instead, the local agency responds with a three tiered approach that emphasizes:

1. Managing speeds and motorist behavior at intersections with high LOS.
2. Reviewing traffic growth patterns when congestion begins to appear and planning for appropriate ways to address additional congestion.
3. Taking steps to manage congestion, including moving from intersection-specific metrics to LOS for an entire corridor.

### *City of Long Beach*

The City of Long Beach Mobility Element outlines the vision, goals, policies, and implementation measures required to improve and enhance the City of Long Beach's local and regional transportation system. The vision for the future of City's transportation system includes:

- Flexible, convenient, affordable, and energy-efficient transportation options.
- Mobility practices that maintain and enhance safety while strengthening community, sense of place, urban design, and the natural environment.
- The most efficient and convenient mode of travel for any particular trip.
- Innovation and appropriate transportation technology.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Professional standards in transportation planning and traffic engineering, with safety as the highest priority.
- Land use planning integrated with a multimodal mobility network, providing people with options to choose various forms of convenient transportation.
- Mobility systems that are planned, maintained, and operated consistent with the principles of complete streets, active living, and sustainable community design.

The mobility element proposes several “big moves” to realize the City’s vision, including those detailed here:

- **Balance the needs of all mobility users.** Goals, policies, and implementation measures would be designed to create a system of complete streets that support and encourage all mobility users, regardless of age or ability, including pedestrians, bicyclists, transit riders, motorists, and truckers. Some streets would be redesigned to create corridors that prioritize walking, bicycling, and/or transit services (that is, “street character change”). On street segments where automobile travel is not emphasized or where intersection or roadway widening is not practical, the City may accept a level of service below its standard of LOS “D” in exchange for pedestrian, bicycle, and/or transit improvements.
- **Implement a context-sensitive and multimodal approach to street planning and design.** In the past, the City of Long Beach has classified streets by their function rather than their context. A context-sensitive street classification system categorizes a jurisdiction’s streets by both function and community context, taking into account all road users and the character of adjacent properties and buildings. This approach will help create a more balanced mobility system; give people more transportation choices; and help integrate mobility, land use, and urban design for better “placemaking.”
- **Increase the efficiency of the roadway and highway system through innovative facilities and programs.** Long Beach is a nearly built-out city with a developed mobility network. As the population grows, there will be limited opportunities to acquire additional right-of-way for vehicular traffic. Instead, future improvements will be aimed at making the mobility network more efficient by encouraging other modes of transportation and by using innovation and technology to improve the flow of traffic along corridors.
- **Provide multimodal connectivity to create a seamless mobility system.** The City’s goal is a seamless link between all modes of transportation so that trips are not disrupted by system delays, burdensome ticketing procedures, unreasonable waiting times, and extended loading and unloading periods.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- **Support active transportation and active living.** Active transportation uses the energy of the human body to get from place to place—such as walking, bicycling, roller skating, and skateboarding. By making active transportation a viable option for everyday travel, the City of Long Beach can help alleviate roadway congestion, reduce greenhouse gas emissions, improve physical health and wellness, and reduce obesity rates.

In addition, the City’s municipal code includes regulations related to pedestrian, bicycle, and vehicular mobility:

- Chapter 10.08 (Traffic Control Devices)
- Chapter 10.58 (Pedestrians)
- Chapter 10.48 (Bicycles)
- Chapter 18.17 (Transportation Improvement Fee)

### 5.16.1.2 EXISTING ROADWAY NETWORK

Regional access to Long Beach within the study area is provided by the I-405, I-710, and PCH (SR-1). Roadways in the study area are classified per the City of Long Beach Mobility Element and the Los Angeles County CMP.

- **PCH (SR-1).** PCH is classified as a State Highway (Arterial) in the Los Angeles County CMP and as a Regional Corridor in the City of Long Beach Mobility Element. The roadway extends south from State Route 101 in Leggett, California, along the Pacific Coast over 650 miles before terminating at Interstate 5 in Dana Point, California. Within the study area, PCH has an east-west orientation and is a six-lane facility divided by a two-way left-turn lane. On-street parking is generally permitted with time restraints and other restrictions. The posted speed limit in the study area is 35 miles per hour (mph).
- **San Diego Freeway (I-405).** I-405 is classified as a State Freeway in the Los Angeles CMP and as a Freeway in the City of Long Beach Mobility Element. I-405 runs from Irvine to San Fernando, cutting through the City of Long Beach. Within the study area, I-405 has ten lanes with a posted speed of 65 mph.
- **Garden Grove Freeway (SR-22).** SR-22 is classified as a State Freeway in the Los Angeles CMP and as a Freeway in the City of Long Beach Mobility Element. The roadway begins at SR-55 and ends at PCH in Long Beach. Within the study area, SR-22 has six lanes into the heart of Long Beach and a posted speed limit of 45 mph.
- **Studebaker Road.** Studebaker Road is classified as a Major Avenue in the City of Long Beach Mobility Element. The roadway runs north-south and provides direct access to I-405 and SR-22.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Studebaker Road begins at 2nd Street in Long Beach and extends to Los Coyotes Diagonal south of Lakewood. Within the study area, Studebaker Road is a divided four-lane facility with a median and has a posted speed limit of 40 mph.

- **7th Street.** 7th Street is classified as a Boulevard in the City of Long Beach Mobility Element. It runs east-west and acts as major roadway throughout the Long Beach area. 7th Street begins at PCH in eastern Long Beach and extends to Downtown Long Beach. Within the study area, 7th Street is a six-lane undivided facility with a posted speed limit of 35 to 40 mph.
- **Loynes Drive.** Loynes Drive is classified as a Neighborhood Connector in the City of Long Beach Mobility Element. It runs in east-west and spans a short distance, from Studebaker Road to Bellflower Boulevard within Long Beach. Within the study area, Loynes Drive is a four-lane facility with a median and has a posted speed limit of 35 mph.
- **2nd Street.** 2nd Street is classified as a Boulevard in the City of Long Beach Mobility Element. It runs east-west and extends between Livingston Drive and Island Village Drive. At Village Island Drive, 2nd Street becomes Westminster Boulevard. Within the study area, 2nd Street is a four- to six-lane roadway divided by a median and has a posted speed limit of 40 to 50 mph.
- **Ximeno Avenue.** Ximeno Avenue is classified as a Neighborhood Connector in the City of Long Beach Mobility Element. The roadway is a north-south facility covering Long Beach from Los Coyotes Diagonal to 2nd Street. Within the study area, Ximeno Avenue is a two-lane undivided facility with a posted speed limit of 25 mph.
- **Bellflower Boulevard** Bellflower Boulevard is classified as a Boulevard in the City of Long Beach Mobility Element. The roadway spans Long Beach, Lakewood, and Downey and provides direct access to I-105, I-405, SR-1, and SR-91. The roadway is a north-south facility beginning at Loynes Drive in Long Beach and terminating at Lakewood Boulevard in Downey. Within the study area, Bellflower Boulevard is a four- to six-lane divided roadway with a raised median. Bellflower Boulevard has a posted speed limit of 35 to 40 mph.

The study area for the Project stretches from Ximeno Avenue to Seal Beach Boulevard to the east, as far south as 1st Street, and as far north as Atherton Street. The study area consists of major intersections along PCH, Studebaker Road, 7th Street, and 2nd Street. A vicinity map displaying the study area and analyzed intersections is provided in Figure 5.16-1. In consultation with City staff, the following study intersections were identified for analysis:

1. Studebaker Road & Interstate (I)-405 Northbound On-Ramp, Caltrans
2. Studebaker Road & I-405 Southbound Off-Ramp, Caltrans
3. Studebaker Road & SR-22 Westbound Ramps, Caltrans


**5. Environmental Analysis**  
**TRANSPORTATION AND TRAFFIC**

4. 7th Street & Ximeno Avenue, City of Long Beach
5. Pacific Coast Highway & 7th Street, Caltrans
6. Bellflower Boulevard & 7th Street, Caltrans
7. Channel Drive & 7th Street, Caltrans
8. Campus Drive & 7th Street, Caltrans
9. Bellflower Boulevard & Pacific Coast Highway, Caltrans
10. Channel Drive & Pacific Coast Highway, Caltrans
11. Studebaker Road & SR-22 Eastbound Ramps, Caltrans
12. Pacific Coast Highway & Loynes Drive, Caltrans
13. Studebaker Road & Loynes Drive, City of Long Beach
14. 2nd Street & Naples Plaza, City of Long Beach
15. Marina Drive & 2nd Street, City of Long Beach
16. Pacific Coast Highway & 2nd Street, Caltrans
17. Shopkeeper Road & 2nd Street, City of Long Beach
18. Studebaker Road & 2nd Street, City of Long Beach
19. 2nd Street/Westminster Boulevard & Seal Beach Boulevard, City of Seal Beach
20. Pacific Coast Highway & Studebaker Road, Caltrans
21. Pacific Coast Highway & 1st Street, Caltrans
22. Pacific Coast Hwy & Seal Beach Boulevard., City of Seal Beach
23. 1st St. & Marina Drive, Seal Beach
24. SR-22 & Studebaker Road & College Park Drive, Caltrans
25. 7th Street & Santiago Avenue, City of Long Beach
26. 7th Street & Park Avenue, City of Long Beach
27. 2nd Street & Bay Shore Avenue, City of Long Beach
28. 2nd Street & Livingston Drive, City of Long Beach

In addition to the study area noted above, freeway assessment was completed on key facilities on I-405, SR-22, and I-605 as requested by Caltrans.



Figure 5.16-1 - Study Area Intersection Analysis Locations  
5. Environmental Analysis

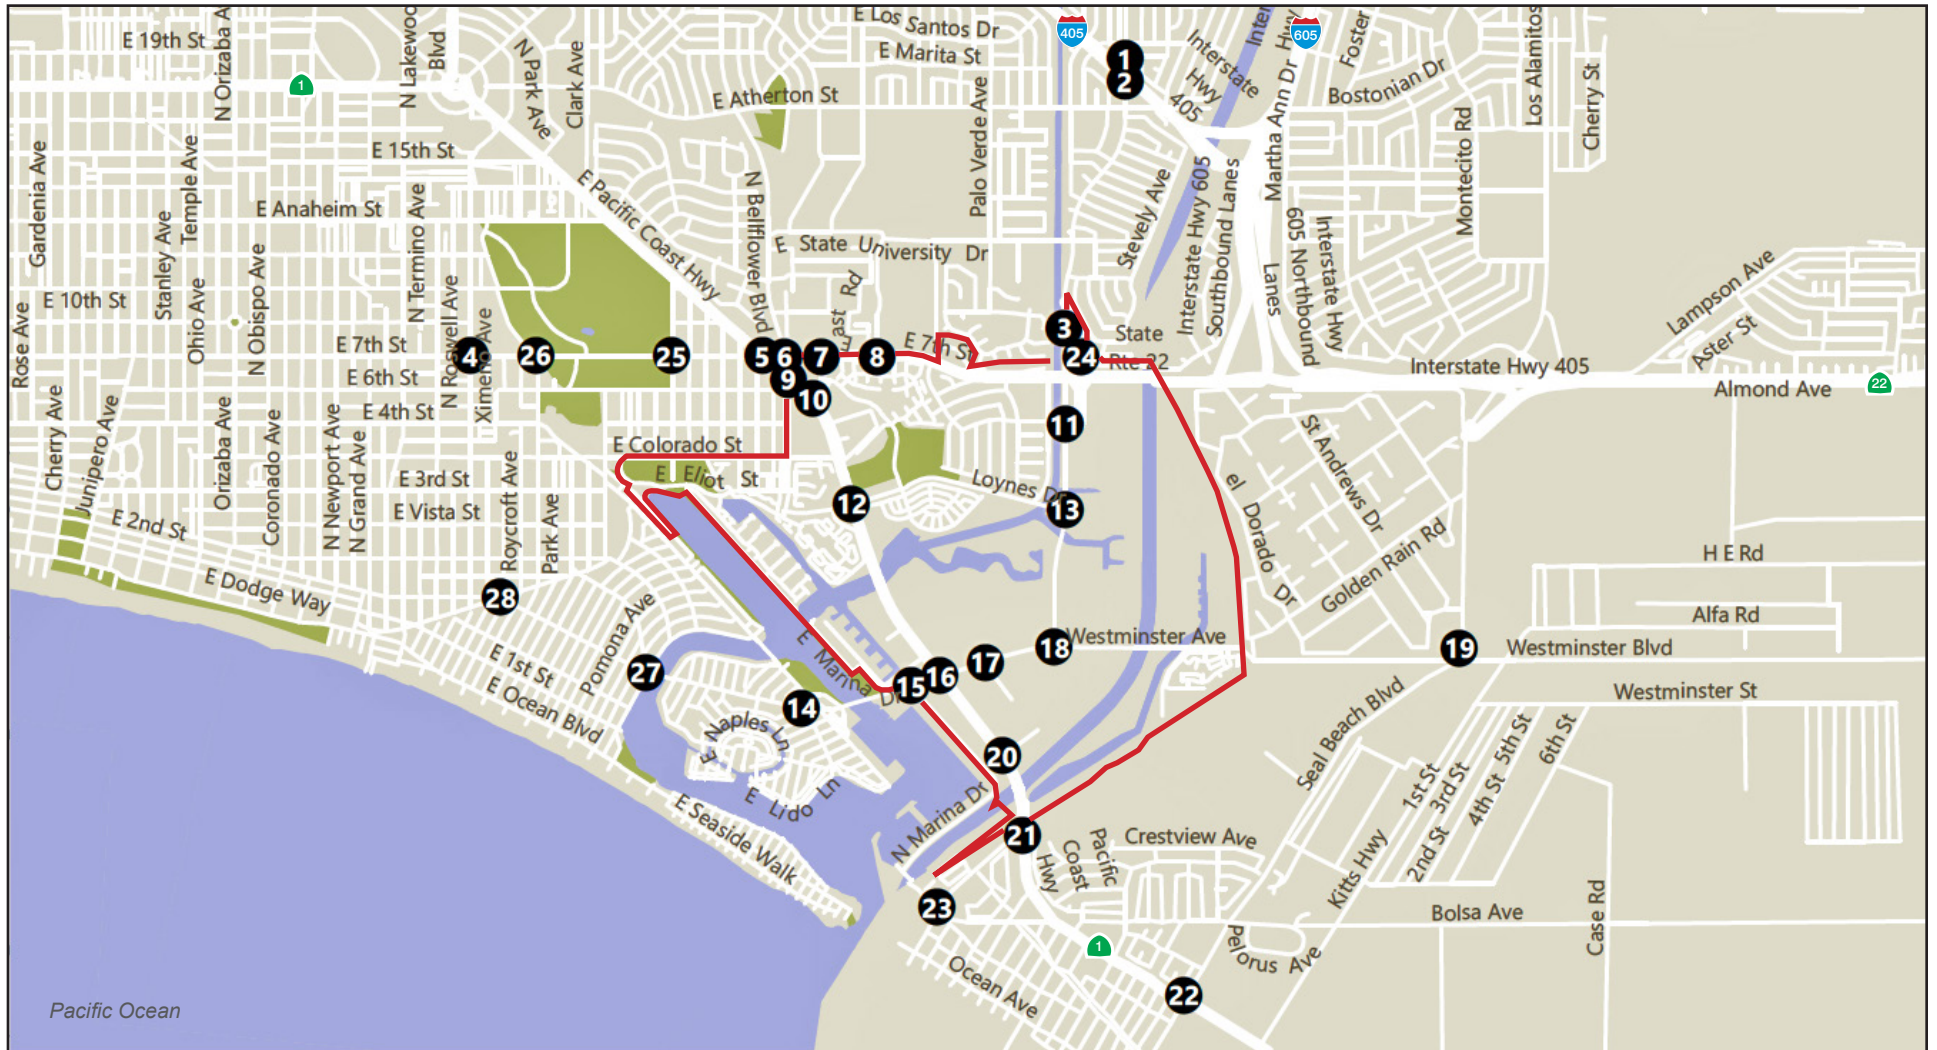

— SEASP Study Area      # Study Intersections

0 4,000  
Scale (Feet)



Base Map Source: Fehr & Peers, 2017

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*This page intentionally left blank.*

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**5.16.1.3 EXISTING TRAFFIC CONDITIONS**

Existing morning (7:00 to 9:00 AM) and afternoon (4:00 to 6:00 PM) peak period vehicle counts at 21 study intersections were conducted on July 14, 2015. July was chosen based on comments received that summer travel patterns in this area are higher than non-summer travel patterns which was also confirmed with City staff. Due to comments received on the DEIR, seven additional intersections were added to the study area. The City of Seal Beach submitted traffic counts collected in September 2016 for inclusion in the study at three study intersections. Three additional intersection counts were collected as part of the 2nd/PCH development study in November 2016, and an additional count was collected in January 2017 at one intersection. Figure 3-5 of the transportation impact analysis (TIA) summarizes the existing AM and PM peak traffic volumes and lane configurations (Appendix J1).

Field observations and lane configuration data were collected on July 23, 2015 at most of the intersections and were supplemented with field work completed in December 2016 as part of the response to comments on the Draft EIR. Signal timing information for the signalized study intersections were provided by Caltrans or the local agencies or were collected in the field. Signal timing parameters were provided for the AM and PM peak hours used in the analysis.

**Intersection LOS Methodology**

For signalized intersections, the traffic analysis was evaluated in accordance with the CMP guidelines using the Intersection Capacity Utilization (ICU) methodology. It reports the volume-to-capacity (V/C) ratio, which evaluates the critical movements for each signal and compares that to the critical movement capacity of the intersection. For unsignalized intersections and Caltrans-owned intersections, methodologies consistent with the Highway Capacity Manual 2010 (HCM 2010) were used.

Based on the V/C and delay findings, the methodologies assign a qualitative letter grade that represents the operations of the intersection—from LOS A (minimal delay) to LOS F (excessive congestion). LOS E represents at-capacity operations. Descriptions of the LOS letter grades for signalized and unsignalized intersections are provided in Table 5.16-1.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-1 Intersection Level of Service Criteria

LOS	Interpretation	Signalized Intersections Volume-to-Capacity (V/C) Ratio	Signalized Intersection Delay (sec)	Unsignalized Intersections Delay (seconds)
A	<b>Signalized:</b> Operations with very low delay occurring with favorable progression and/or short cycle length. <b>Unsignalized:</b> Little or no delay.	0.000-0.600	0.000 – 0.600	≤ 10.0
B	<b>Signalized:</b> Operations with low delay occurring with good progression and/or short cycle lengths. <b>Unsignalized:</b> Short traffic delays.	0.601-0.700	0.601 – 0.700	> 10.0 to 15.0
C	<b>Signalized:</b> Operations with average delays resulting from fair progression and/or longer cycle lengths. Individual cycle failures begin to appear. <b>Unsignalized:</b> Average traffic delays.	0.701-0.800	0.701 – 0.800	> 15.0 to 25.0
D	<b>Signalized:</b> Operations with longer delays due to a combination of unfavorable progression, long cycle lengths, or high V/C ratios. Many vehicles stop and individual cycle failures are noticeable. <b>Unsignalized:</b> Long traffic delays.	0.801-0.900	0.801 – 0.900	> 25.0 to 35.0
E	<b>Signalized:</b> Operations with high delay values indicating poor progression, long cycle lengths, and high V/C ratios. Individual cycle failures are frequent occurrences. <b>Unsignalized:</b> Very long traffic delays.	0.901-1.000	0.901 – 1.000	> 35.0 to 50.0

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-1 Intersection Level of Service Criteria**

LOS	Interpretation	Signalized Intersections Volume-to-Capacity (V/C) Ratio	Signalized Intersection Delay (sec)	Unsignalized Intersections Delay (seconds)
F	<p><b>Signalized:</b> Operation with delays unacceptable to most drivers occurring due to over saturation, poor progression, or very long cycle lengths.</p> <p><b>Unsignalized:</b> Extreme traffic delays with intersection capacity exceeded</p>	Greater than 1.000	Greater than 1.000	Greater than 50.0

Source: Fehr & Peers 2017a.

Note: V/C = Volume to Capacity

**Intersection LOS**

Existing-conditions traffic volumes, lane configurations, and signal timing information provided by City staff were used to analyze operations at the study intersections for AM and PM peak-hour conditions, using methodologies described above. The results of the analysis are summarized in Table 5.16-2. The cities of Long Beach and Seal Beach identify that LOS D is generally considered the lowest acceptable level for operation of intersections that fall under its jurisdiction, and for Caltrans LOS C is the worst level considered acceptable. However, the target LOS for Pacific Coast Highway is D, according to the Caltrans Transportation Concept Report for Pacific Coast Highway. As shown in Table 5.16-2, nine intersections operate at a deficient LOS during one or more peak hours under existing conditions:

- 3. Studebaker Road & SR-22 Westbound Ramps – PM Peak Hour (LOS F)
- 4. 7th Street & Ximeno Avenue – PM Peak Hour (LOS E)
- 5. Pacific Coast Highway & 7th Street –PM Peak Hour (LOS E)
- 7. Channel Drive & 7th Street – PM Peak Hour (LOS E)
- 16. Pacific Coast Highway & 2nd Street – AM Peak Hour (LOS E), PM Peak Hour (LOS E)
- 22. Pacific Coast Highway & Seal Beach Boulevard –AM Peak Hour (LOS E)
- 24. SR-22 at Studebaker Road & College Park Drive – PM Peak Hour (LOS E)
- 26. 7th Street & Park Avenue – AM Peak Hour (LOS E), PM Peak Hour (LOS E)
- 27. 2nd Street & Bay Shore Avenue – PM Peak Hour (LOS F)

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-2 Intersection Level of Service for Existing (2015) Conditions

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
1. Studebaker Rd & I-405 Northbound On-Ramp <sup>3</sup>	Signal	8.7	A	9.4	A
2. Studebaker Rd & I-405 Southbound Off-Ramp <sup>4</sup>	Side-Street Stop	12.8	B	12.8	B
3. Studebaker Rd & SR-22 Westbound Ramps	Signal	30.6	C	>80.0	F
4. 7th St & Ximeno Ave	Signal	0.899	D	0.910	E
5. Pacific Coast Hwy & 7th St	Signal	43.8	D	59.6	E
6. Bellflower Blvd & 7th St	Signal	34.1	C	32.8	C
7. Channel Dr & 7th St	Signal	7.1	A	61.0	E
8. Campus Dr & 7th St <sup>3</sup>	Signal	18.9	B	19.5	B
9. Bellflower Blvd & Pacific Coast Hwy	Signal	27.2	C	27.6	C
10. Channel Dr & Pacific Coast Hwy	Signal	16.0	B	13.0	B
11. Studebaker & SR-22 Eastbound Ramps	Signal	6.2	A	5.6	A
12. Pacific Coast Hwy & Loynes Dr	Signal	30.1	C	38.3	D
13. Studebaker Rd & Loynes Dr	Signal	0.610	B	0.723	C
14. 2nd St & Naples Plaza	Signal	0.654	B	0.740	C
15. Marina Dr & 2nd St	Signal	0.609	B	0.772	C
16. Pacific Coast Hwy & 2nd St	Signal	56.5	E	68.8	E
17. Shopkeeper Rd & 2nd St	Signal	0.573	A	0.788	C
18. Studebaker Rd & 2nd St	Signal	0.629	B	0.807	D
19. 2nd St/Westminster Blvd & Seal Beach Blvd	Signal	0.577	A	0.857	D
20. Pacific Coast Hwy & Studebaker Rd	Signal	13.4	B	27.2	C
21. Pacific Coast Hwy & 1st St	Signal	13.9	B	13.5	B
22. Pacific Coast Hwy & Seal Beach Blvd	Signal	0.931	E	0.788	C
23. 1st St. & Marina Dr.	All-Way Stop	8.8	A	10.4	B
24. SR-22 & Studebaker Rd & College Park Dr	Side-Street Stop	17.4	C	46.1	E
25. 7th St & Santiago Av	Signal	0.704	C	0.652	B
26. 7th St & Park Av	Signal	0.959	E	0.913	E
27. 2nd St & Bay Shore Av	Signal	0.841	D	1.004	F

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-2 Intersection Level of Service for Existing (2015) Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
28. 2nd St & Livingston Dr	Signal	0.624	B	0.574	A

Source: Fehr & Peers 2017a.

Notes: V/C = Volume / Capacity Ratio

Intersections operating below acceptable LOS are shown in **bold**.

<sup>1</sup> V/C for signalized intersections based on ICU methodology using Traffix 7.9 software.

<sup>2</sup> Delay for unsignalized intersections based on HCM 2010 methodology using Synchro 8 Build 806 software. Delay for side-street stop is reported as the worst-case approach delay.

<sup>3</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze intersections with exclusive pedestrian phases.

<sup>4</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze stop-controlled intersections with exclusive and shared turn lanes.

**Freeway Level of Service Analysis Methodology**

The freeway segments in the study area were analyzed for the basic, merge, and diverge components where capacity constraints typically occur on the freeway system, utilizing the HCM 2010 methodologies upon request from Caltrans. LOS for each of these segments is defined by density (passenger cars per mile per lane). Table 5.16-3 shows the LOS criteria for each freeway segment. Density and speed data were utilized from Caltrans.

**Table 5.16-3 Freeway Mainline and Ramp Junction Section LOS Threshold**

Level of Service	Description	Density (vplpm) <sup>1</sup>	
		Mainline (Basic)	Ramp/Merge/Diverge
A	Free-flow speeds prevail. Vehicles are almost completely unimpeded in their ability to maneuver within the traffic stream.	≤ 11	≤ 10
B	Free-flow speeds are maintained. The ability to maneuver with the traffic stream is only slightly restricted.	> 11 to 18	> 10 to 20
C	Flow with speeds at or near free-flow speeds. Freedom to maneuver within the traffic stream is noticeably restricted, and lane changes require more care and vigilance on the part of the driver.	> 18 to 26	> 20 to 28

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-3 Freeway Mainline and Ramp Junction Section LOS Threshold**

Level of Service	Description	Density (vplpm) <sup>1</sup>	
		Mainline (Basic)	Ramp/Merge/Diverge
D	Speeds decline slightly with increasing flows. Freedom to maneuver with the traffic stream is more noticeably limited, and the driver experiences reduced physical and psychological comfort.	> 26 to 35	> 28 to 35
E	Operation at capacity. There are virtually no usable gaps within the traffic stream, leaving little room to maneuver. Any disruption can be expected to produce a breakdown with queuing.	> 35 to 45	> 35 to 45 <sup>2</sup>
F	Represents a breakdown in flow.	> 45	> 45 <sup>2</sup>

Source: Highway Capacity Manual (Transportation Research Board, 2010).

Notes: Density is reported in vehicles per lane per mile (vplpm).

<sup>1</sup> The maximum density for ramp junctions and weaving sections under LOS E is not defined in the HCM. The maximum density for basic segments of 45 vplpm was assumed to apply to ramp junctions.

**Freeway LOS for Existing Conditions**

Traffic count data were gathered from available sources, including the Caltrans Performance Measurement System (PeMS) and peak-hour intersection counts collected at study intersections. Ramp volumes were identified based on existing count data at intersections.

The operations at study freeway main line and ramp locations for existing conditions are summarized in Table 5.16-4. The following freeway segments, off-ramps, and on-ramps operate at a deficient LOS during the peak hours under existing conditions:

- Westbound SR-22 – AM Peak Hour (LOS D), PM Peak Hour (LOS E)
- Studebaker On-Ramp – AM Peak Hour (LOS D), PM Peak Hour (LOS D)
- Eastbound SR-22 – AM Peak Hour (LOS D), PM Peak Hour (LOS D)
- Northbound I-405 from Studebaker Road to Cherry Avenue - AM and PM Peak Hour (LOS F)
- Southbound I-405 from Cherry Avenue to Studebaker Road- AM and PM Peak Hour (LOS F)



5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Northbound I-605 from I-405 to Katella Avenue- AM Peak Hour (LOS E), PM Peak Hour (LOS F)
- Northbound I-605 from Katella Avenue to Carson Avenue - AM and PM Peak Hour (LOS F)
- Southbound I-605 from Carson Avenue to I-405 - AM and PM Peak Hour (LOS F)

**Table 5.16-4 Freeway Mainline and Ramps Operations, Existing Conditions**

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
<b>I-405 Northbound</b>					
I-405 Northbound North of Studebaker	Basic	40.4	E	-	F
Studebaker On-Ramp	Basic	-	F	-	F
Palo Verde Ave to Woodruff Ave	Basic	-	F	-	F
Woodruff Ave to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Lakewood Blvd	Basic	-	F	-	F
Lakewood Blvd to Spring St	Basic	-	F	-	F
Spring St to Cherry Ave	Basic	-	F	-	F
<b>I-405 Southbound</b>					
Cherry Ave to Spring St	Basic	-	F	-	F
Lakewood Blvd to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Woodruff Ave	Basic	-	F	-	F
Woodruff to Palo Verde Ave	Basic	-	F	-	F
Palo Verde Ave to Studebaker Rd	Basic	-	F	-	F
Studebaker Off-Ramp	Basic	-	F	-	F
I-405 Southbound North of Studebaker	Basic	42.4	E	-	F
<b>I-605 Northbound</b>					
I-405 to Katella Ave	Basic	37.1	E	-	F
Katella Ave to Spring St	Basic	-	F	-	F
Spring St to Carson Ave	Basic	-	F	-	F
<b>I-605 Southbound</b>					
Carson Ave to Spring St	Basic	-	F	-	F
Spring St to Katella Ave	Basic	-	F	-	F
Katella Ave to I-405	Basic	-	F	-	F
<b>SR-22 Westbound</b>					
Westbound SR-22	Basic	29.0	D	38.9	E

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-4 Freeway Mainline and Ramps Operations, Existing Conditions

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
Studebaker Off-Ramp	Diverge	25.0	C	27.6	C
<b>SR-22 Eastbound</b>					
Studebaker On-Ramp	Merge	31.8	D	29.2	D
Eastbound SR-22	Basic	31.4	D	27.9	D

Source: Fehr & Peers, 2017a.

Notes: Pc/mi/ln = passenger cars per mile per lane.

Freeway facilities operating below acceptable LOS are shown in **bold**.

Calculations were made using Highway Capacity Manual 2010 methodologies.

Density is not reported for segments operating at LOS F

### Bicycle Facilities

The City of Long Beach is serviced by Class I, II, and III bicycle facilities, bicycle boulevards, and separated bicycle lanes (Cycle Track or Class IV).

- Class I bike paths are separated from roadway traffic and allow bicyclist and pedestrian access.
- Class II bicycle facilities are designated lanes alongside vehicular traffic lanes.
- Class III bike routes are roadways that are signed for bicyclists, and sometimes striped with a sharrow marking, but have no designated lane.
- Bicycle boulevards are low-speed streets that have been “optimized” for bicycle traffic through traffic calming and right-of-way assignment. These are typically neighborhood streets that allow local vehicle traffic access but discourage cut-through vehicle traffic.
- Separated bicycle lanes, also known as a “cycle track” or Class IV bike facilities, are exclusive bicycle facilities with elements of a separated path and on-road bike lane. Cycle tracks are within the roadway right-of-way but are physically separated from motor traffic. In 2002, the City of Long Beach installed over two miles of cycle track in the downtown area.

Within the study area, there are existing Class I and II bikeways along portions of 7th Street, 2nd Street, and Loynes Drive. These bikeways are discontinuous in certain areas. Additionally, there is a Class I bikeway (San Gabriel River Trail) along the San Gabriel River. It extends from the base of the San Gabriel to the Pacific Ocean. and connects to the Rio Hondo River Trail, Bellflower Bike

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Trail and Coyote Creek Bikeway, forming the backbone of a large regional trail system. Existing and future bicycle facilities are shown on Figure 5.16-2.

**Pedestrian Facilities**

Existing pedestrian facilities in the SEASP area are limited. Most major roadways lack sidewalks on one or both sides of the street. 7th Street (between Ximeno Avenue and Studebaker Road) and 2nd Street (between Naples Plaza and Marina Drive) have well-developed sidewalks on both sides. Most intersections have crosswalks and appropriate pedestrian crossing controls, allowing for connectivity to local activity centers. Pedestrian facilities are shown on Figure 5.16-3.

**Public Transit**

The study area is serviced by multiple Long Beach Transit bus routes. The City of Long Beach has high bus ridership rates—1,259,928 average weekday boardings as of June 2015, according to Metro ridership statistics (Fehr & Peers 2017a). Additionally, Orange County Transportation Authority services this area, providing access between Orange County and this part of the City of Long Beach. The routes are shown on Figure 5.16-4 and listed below.

*Long Beach Transit*

- Route 45 (Anaheim Street to Santa Fe Avenue)
- Route 46 (Anaheim Street to Downtown)
- Route 81 (10th Street to CSULB)
- Routes 91 (7th Street/Bellflower Boulevard)
- Routes 92 (7th Street/Woodruff Avenue)
- Routes 93 (7th Street/Clark Avenue)
- Routes 94 (7th Street to Los Altos Only)
- Route 121 (Ocean/Belmont Shore/CSULB/PCH at Ximeno Avenue)
- Route 131 (Redondo Avenue to Seal Beach)

*Orange County Transit Authority*

- Route 1 (Long Beach to San Clemente)
- Route 42 (Seal Beach to Orange)
- Route 50 (Long Beach to Orange)
- Route 60 (Long Beach to Tustin)

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

California State University, Long Beach (CSULB), in partnership with Long Beach Transit, offers free use of all Long Beach Transit buses to all eligible CSULB students, faculty, and staff. Use is via transit access pass cards obtained on campus. Free use by students is available during semesters the students are enrolled (CSULB 2016). Many CSULB students and employees rely on Long Beach Transit to travel to and from the university. As development increases in Long Beach's Southeast Area, CSULB would like to see increased capacity and expanded hours for Long Beach Transit routes that stop on campus, specifically routes 91, 92, 93, 94, 96, 121, and 171.


### 5.16.2 Thresholds of Significance

According to Appendix G of the CEQA Guidelines, a project would normally have a significant effect on the environment if the project could:

- T-1 Conflict with an applicable plan, ordinance or policy establishing measures of effectiveness for the performance of the circulation system, taking into account all modes of transportation including mass transit and non-motorized travel and relevant components of the circulation system, including but not limited to intersections, streets, highways and freeways, pedestrian and bicycle paths, and mass transit.
- T-2 Conflict with an applicable congestion management program, including, but not limited to level of service standards and travel demand measures, or other standards established by the county congestion management agency for designated roads or highways.
- T-3 Result in a change in air traffic patterns, including either an increase in traffic levels or a change in location that results in substantial safety risks.
- T-4 Substantially increase hazards due to a design feature (e.g., sharp curves or dangerous intersections) or incompatible uses (e.g., farm equipment).
- T-5 Result in inadequate emergency access.
- T-6 Conflict with adopted policies, plans, or programs regarding public transit, bicycle, or pedestrian facilities, or otherwise decrease the performance or safety of such facilities.

The Initial Study, included as Appendix A to this DEIR, substantiates that impacts associated with Threshold T-3 would be less than significant: However, due to input received from members of the public, this DEIR has been prepared as a "full scope" EIR, where every environmental topic listed in Appendix G of the CEQA Guidelines is evaluated. Therefore, all the above thresholds are addressed in the following analysis.


Figure 5.16-2 - Existing and Planned Bicycle Facilities  
5. Environmental Analysis

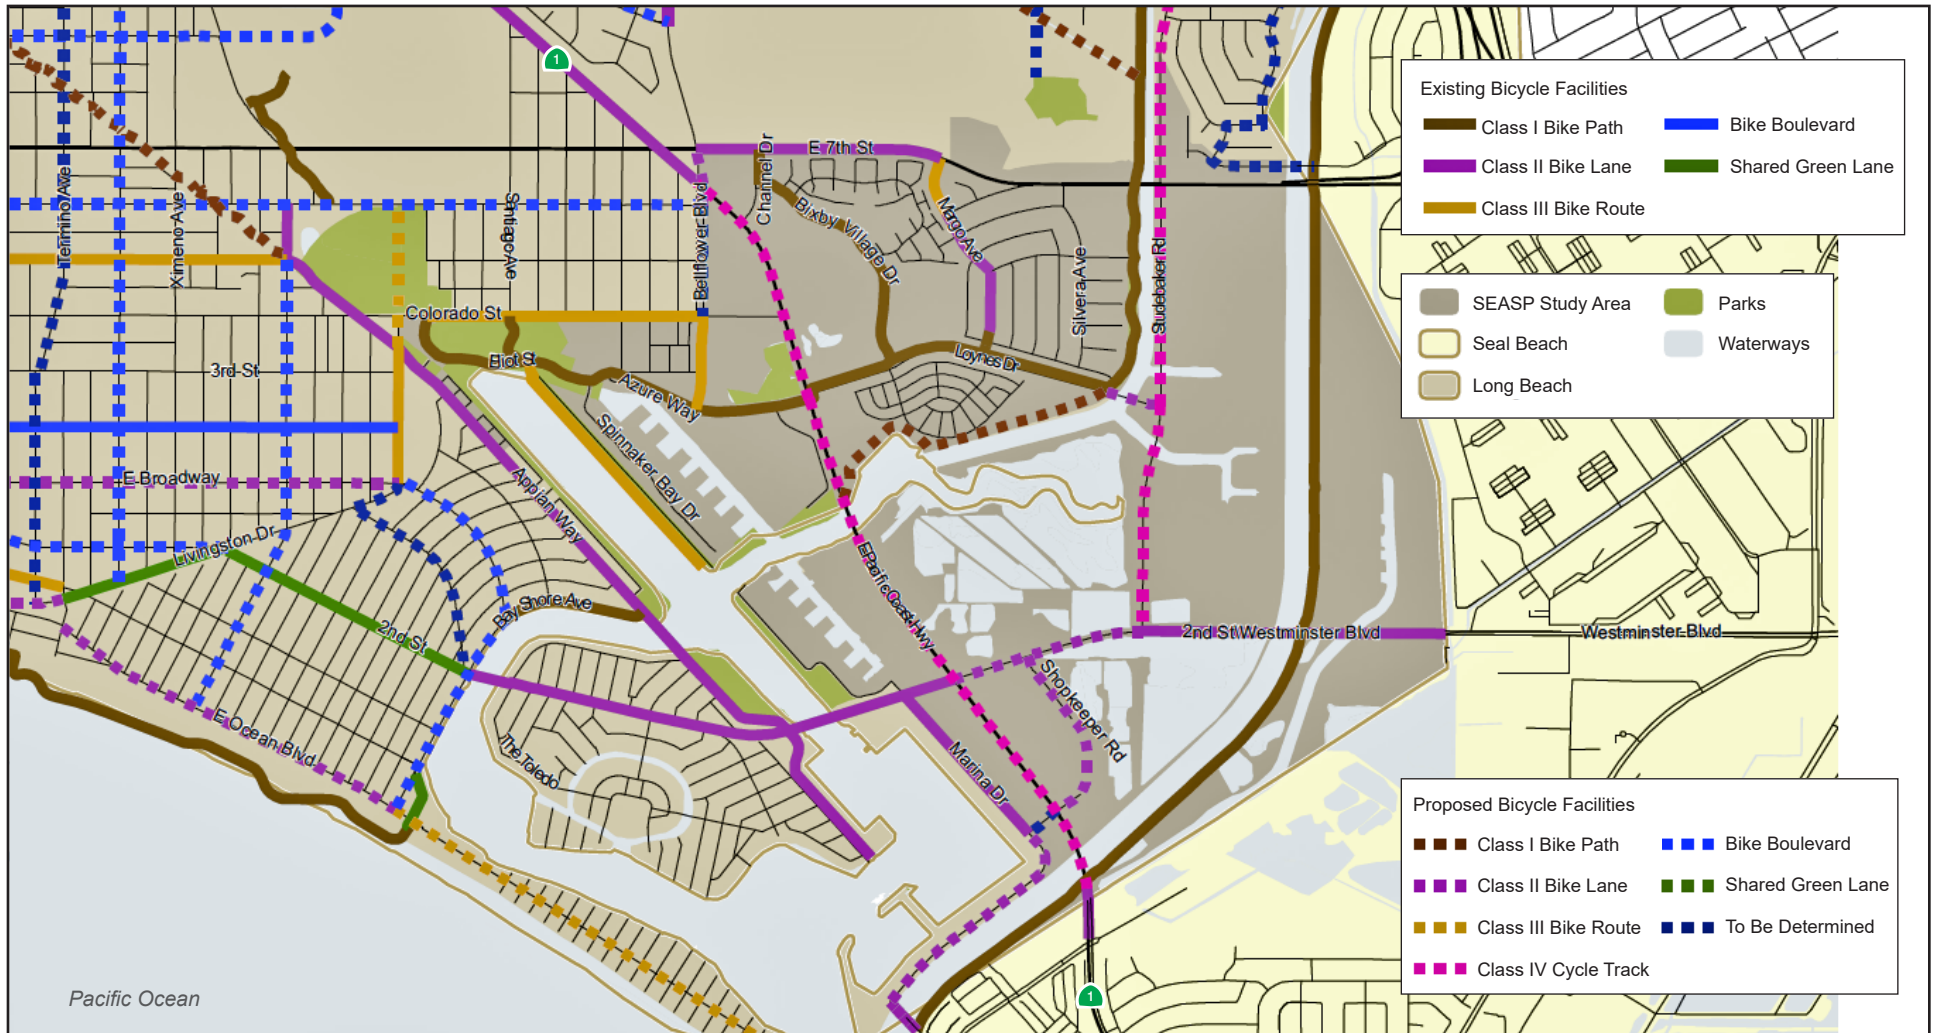

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*This page intentionally left blank.*

Figure 5.16-3 - Existing and Proposed Pedestrian Facilities  
5. Environmental Analysis

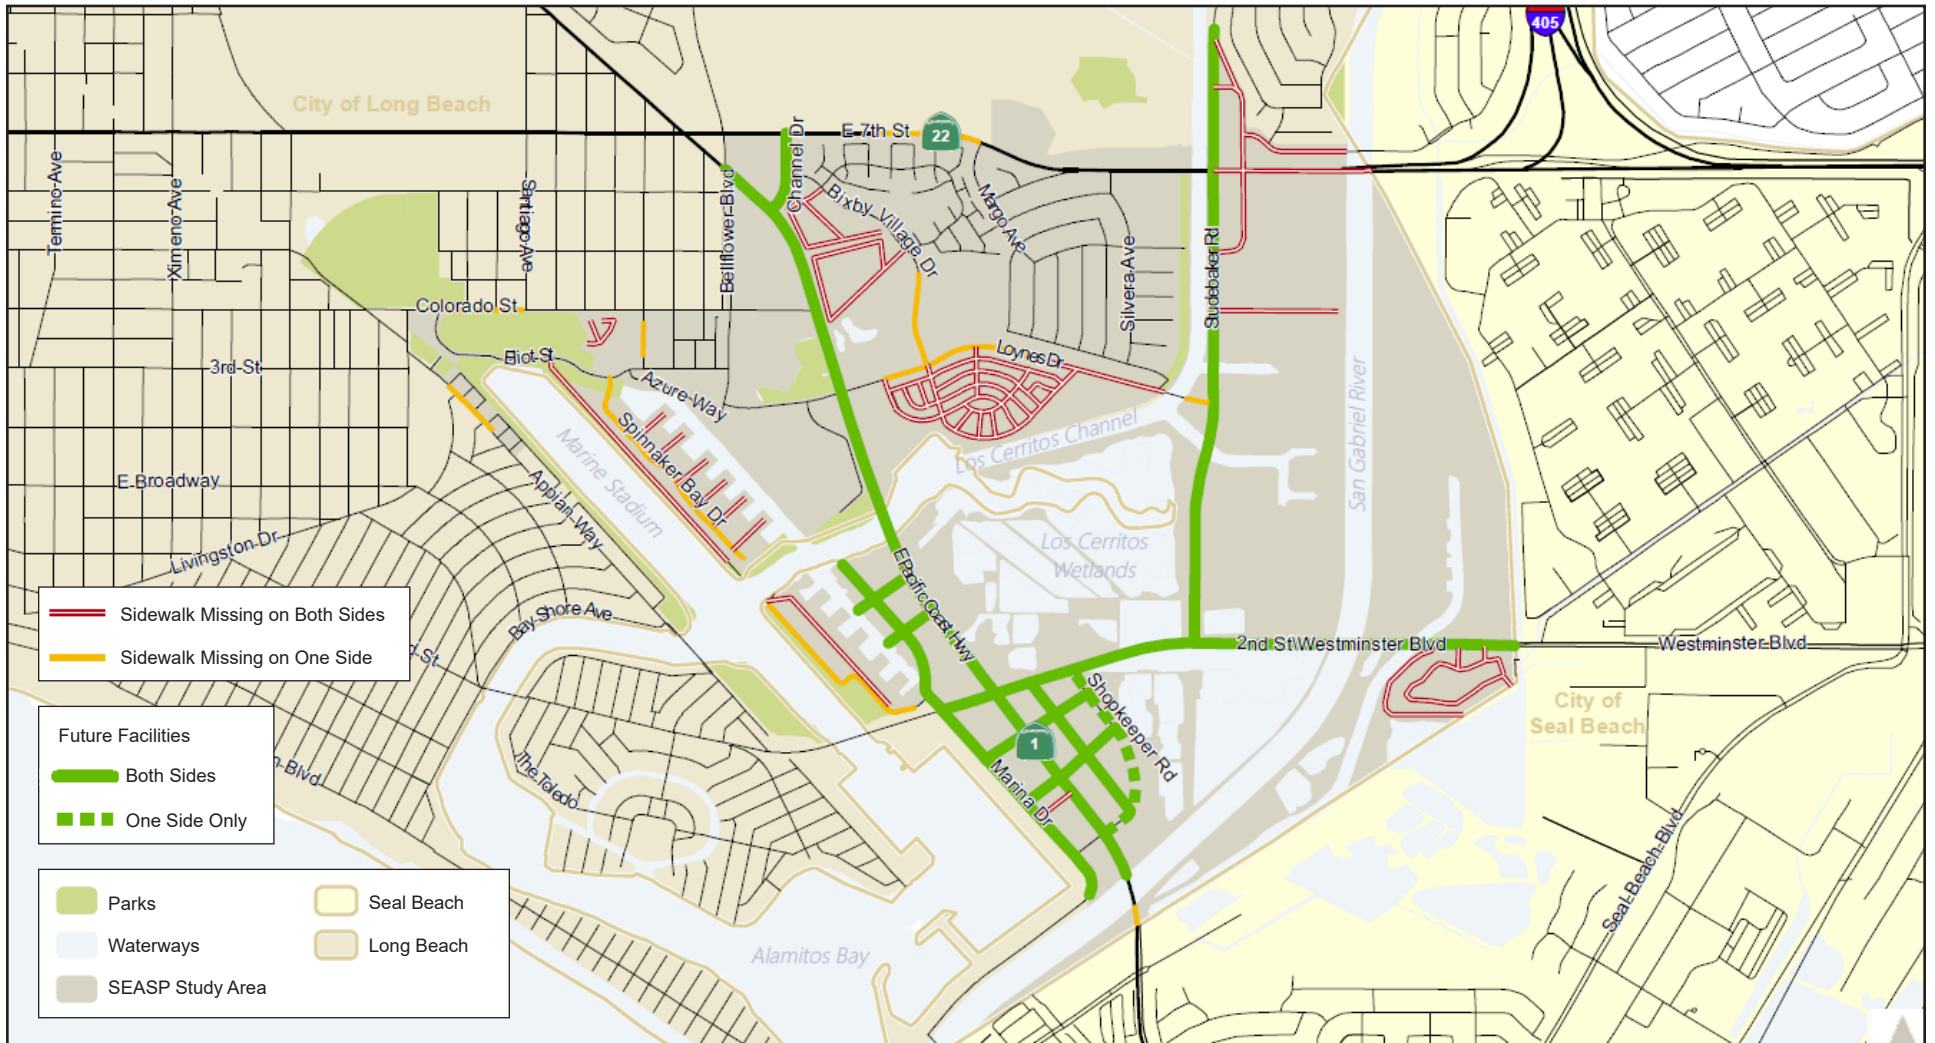


Base Map Source: Fehr & Peers, 2017

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*This page intentionally left blank.*



Figure 5.16-4 - Existing Transit Facilities  
5. Environmental Analysis

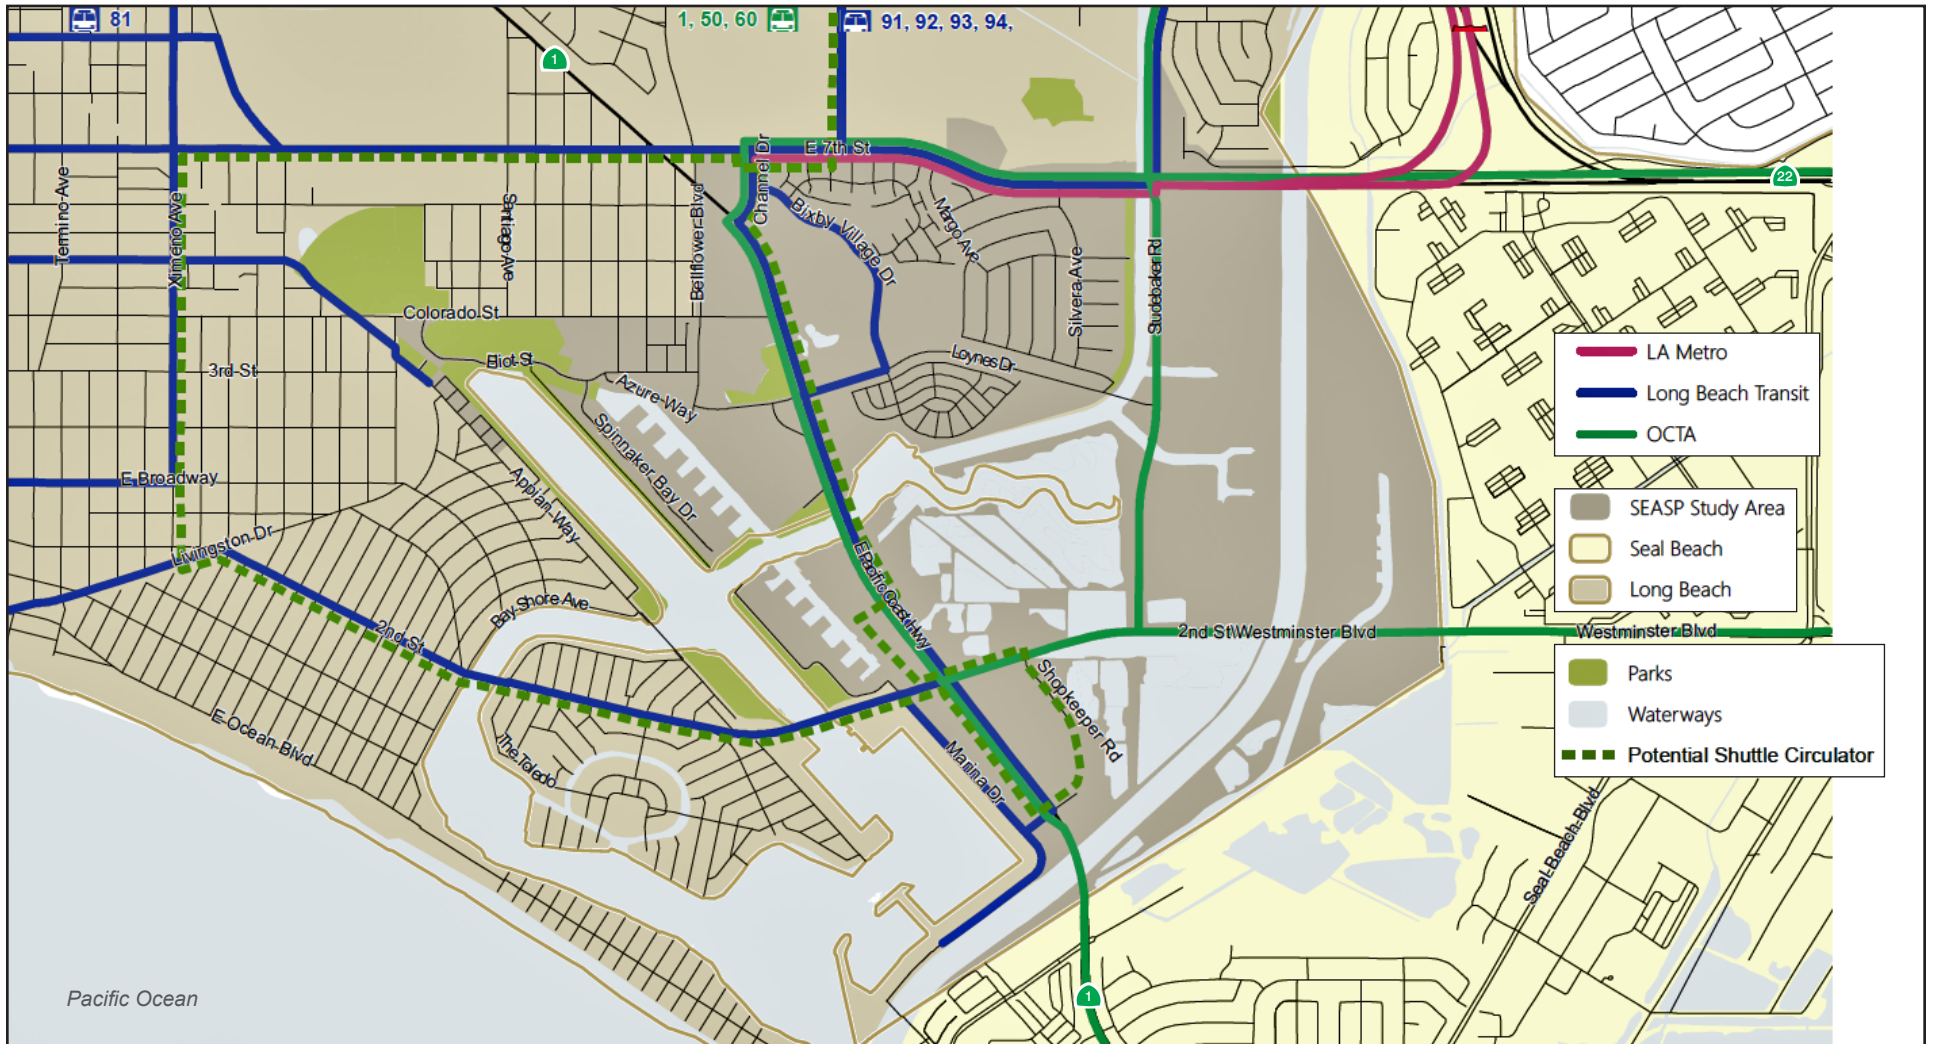

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*This page intentionally left blank.*

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Intersection Significance Criteria**

*City of Long Beach*

For intersections under City of Long Beach's jurisdiction, the significance criteria are consistent with the City of Long Beach Mobility Element LOS policy and the Los Angeles County CMP Guidelines. A significant impact would occur at a signalized study intersection when the Project-related traffic causes:

- A signalized intersection to degrade from an acceptable LOS D or better to LOS E or LOS F, or
- The V/C ratio to increase by 0.02 or more at a signalized intersection that operates at LOS E or LOS F, or
- Causes an unsignalized intersection operating at LOS D or better to degrade to LOS E or LOS F and the intersection satisfies the Manual for Uniform Traffic Control Devices Peak Hour Volume Warrant for Traffic Signal Installation, or
- Adds traffic to an unsignalized intersection operating at an unacceptable LOS E or LOS F such that it satisfies the Manual for Uniform Traffic Control Devices Peak Hour Volume Warrant for traffic signal installation.<sup>1</sup>

If a City of Long Beach intersection is operating at LOS E or worse, mitigation is needed to improve the "With Project" delay to the existing "Without Project" delay. If an impact degrades an acceptable LOS to below acceptable LOS, mitigation is required to bring the LOS back to the acceptable threshold level. No mitigation is required for intersections operating at or above the acceptable threshold (LOS D).

---

<sup>1</sup> This analysis is intended to examine the general correlation between the planned level of future development and the need to install new traffic signals. It estimates future development-generated traffic compared against a sub-set of the standard traffic signal warrants recommended in the Federal Highway Administration Manual on Uniform Traffic Control Devices and associated State guidelines. This analysis should not serve as the only basis for deciding whether and when to install a signal. To reach such a decision, the full set of warrants should be investigated based on field-measured, rather than forecast, traffic data and a thorough study of traffic and roadway conditions by an experienced engineer. Furthermore, the decision to install a signal should not be based solely upon the warrants, since the installation of signals can lead to certain types of collisions. The responsible state or local agency should undertake regular monitoring of actual traffic conditions and accident data, and timely re-evaluation of the full set of warrants in order to prioritize and program intersections for signalization.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

### *City of Seal Beach*

For intersections under the City of Seal Beach's jurisdiction, the significance criteria are consistent with the City of Seal Beach Circulation Element level of service policy and the Orange County CMP Guidelines. A significant impact would occur at a signalized study intersection when the Project-related traffic causes:

- A signalized intersection to degrade from an acceptable LOS D or better to LOS E or LOS F, or
- The V/C ratio to increase by 0.01 or more at a signalized intersection that operates at LOS E or LOS F, or
- Causes an unsignalized intersection operating at LOS D or better to degrade to LOS E or LOS F and the intersection satisfies the Manual for Uniform Traffic Control Devices (MUTCD) Peak Hour Volume Warrant for Traffic Signal Installation, or
- Adds traffic to an unsignalized intersection operating at an unacceptable LOS E or LOS F such that it satisfies the MUTCD Peak Hour Volume Warrant for traffic signal installation.

If a City of Seal Beach intersection is operating at LOS E or worse, mitigation is needed to improve the "With Project" delay to the existing "Without Project" delay. If an impact drops an acceptable LOS to a below than acceptable LOS, mitigation is required to bring the LOS back to the acceptable threshold level. No mitigation is required for intersections operating at or above the acceptable threshold (LOS D).

### *Caltrans*

For intersections under Caltrans's jurisdiction, the significance criteria is consistent with the Caltrans "Guide for the Preparation of Traffic Impact Studies" (2002). A significant impact would occur at a signalized study intersection when the Project-related traffic causes:

- An intersection to degrade from an acceptable LOS C or better to LOS D, LOS E, or LOS F unless an alternative target level of service has been identified for the facility in the Caltrans Transportation Concept Report; or
- Any increase in delay for intersections already operating at LOS D, LOS E, or LOS F, or
- Causes an unsignalized intersection operating at LOS C or better to degrade to LOS D, E, or F and the intersection satisfies the Manual for Uniform Traffic Control Devices (MUTCD) Peak Hour Volume Warrant for Traffic Signal Installation, or

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- Adds traffic to an unsignalized intersection operating at an unacceptable LOS E or LOS F such that it satisfies the MUTCD Peak Hour Volume Warrant for traffic signal installation.

If a Caltrans intersection is operating at LOS D or worse, mitigation is needed to improve the “With Project” delay to existing “Without Project” delay. If an impact drops from an acceptable LOS to an unacceptable LOS, mitigation is required to bring the LOS back to the acceptable level. No mitigation is required for intersections operating at or above the acceptable threshold (LOS C). The target LOS for Pacific Coast Highway is D, according to the Caltrans Transportation Concept Report for Pacific Coast Highway; therefore, mitigation measures would be required to bring intersections on Pacific Coast Highway to LOS D. For other Caltrans intersections, the target LOS is C.

### Freeway Significance Criteria

The Caltrans Guide provides significance criteria for freeway mainline and ramp facilities. Based on this guide, LOS C was utilized as an acceptable threshold for all Caltrans study facilities. This threshold was applied to determine when a facility degrades from acceptable to unacceptable levels. A significant impact would occur at a study freeway segment when the Project-related traffic causes:

- A freeway segment to degrade from an acceptable LOS C or better to LOS D, LOS E or LOS F unless an alternative target level of service has been identified for the facility in the Caltrans Transportation Concept Report; or
- An increase in density for freeway segments already operating at LOS D, LOS E, or LOS F.

### CMP Significance Criteria

The CMP traffic impact analysis guidelines establish that a significant project impact occurs when a certain threshold is exceeded. If the proposed Project increases traffic demand on a CMP facility by 2 percent of capacity ( $V/C \geq 0.02$ ), causing LOS F ( $V/C > 1.00$ ), a significant impact would occur. If the facility is already at LOS F, a significant impact occurs when the proposed Project increases traffic demand on a CMP facility by 2 percent of capacity ( $V/C \geq 0.02$ ).

### 5.16.3 Environmental Impacts

The following impact analysis addresses thresholds of significance related to transportation and traffic. The applicable thresholds are identified in brackets after the impact statement.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

---

### Impact 5.16-1: Project-related trip generation would significantly impact levels of service for the existing area roadway system. [Threshold T-1]

---

*Impact Analysis:* The potential traffic impacts resulting from the proposed Project within study area are addressed below. As part of the TIA, and consistent with Los Angeles County CMP Guidelines, the following scenarios were analyzed in addition to existing conditions:

- **Existing With Project Conditions:** Existing traffic volumes plus Project traffic.
- **Cumulative Year (2035) Without Project Conditions:** Annual growth rate factor applied through Year 2035.
- **Cumulative Year (2035) With Project Conditions:** Cumulative Year traffic volumes plus Project traffic.

#### Project Mobility Improvements

As part of the proposed Project (see Chapter 3, *Project Description*, of this DEIR), there are improvements to the roadway, bicycle, and pedestrian network.

##### *Roadway Connectivity*

The following roadway connections and intersections will be improved:

- **Marina Drive** will have two lanes and connect Pacific Coast Highway to 2nd Street.
- **Studebaker Road/Shopkeeper Road** will have two lanes and connect Pacific Coast Highway to 2nd Street.
- **Pacific Coast Highway and Studebaker Road** westbound approach will be modified from one shared through/left/right lane to one shared through/left-turn lane and one right-turn lane. This improvement is consistent with the proposed roadway connection at Studebaker Road/Shopkeeper Road.

##### *Bicycle Connectivity*

The proposed bikeways will improve bicycle connectivity and accessibility, helping the City of Long Beach to achieve their goal of becoming the most bikeable city in the United States. The following bikeways will be improved:

- Class I bikeway adjacent to the Los Cerritos Channel from Pacific Coast Highway to Loynes Drive

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Class II bikeway along Loynes Drive from the Long Beach Bikeway Route 10 to Studebaker Road
- Class II bikeway along 2nd Street from Pacific Coast Highway and Studebaker Road
- Class II bikeway along Shopkeeper Road from Pacific Coast Highway and 2nd Street
- Class IV bikeway along Pacific Coast Highway from the San Gabriel River bridge to Bellflower Boulevard
- Class IV bikeway along Studebaker Road from 2nd Street to SR-22 Westbound Ramps

*Pedestrian Connectivity*

The following pedestrian facilities will be improved:

- Sidewalks on both sides of the street along Pacific Coast Highway from the San Gabriel River bridge to Bellflower Boulevard
- Sidewalks on both sides of the street along 2nd Street from Marina Drive to the Long Beach City limits
- Sidewalks on both sides of the street along Marina Drive from the Los Cerritos Channel to the San Gabriel River
- Sidewalks on both sides of the street along Studebaker Road from 2nd Street to SR-22 Westbound Ramps
- Sidewalks on one side of the street along Shopkeeper Road from Pacific Coast Highway to 2nd Street
- Sidewalks on both sides of the street along Channel Drive from Pacific Coast Highway to 7th Street
- Sidewalks on both sides of the street within the Project site adjacent to Pacific Coast Highway, Marina Drive, and 2nd Street
- Shorter block lengths in the Project area to create new internal streets improving pedestrian and bicycle circulation

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

### Project Design Features

In addition to the proposed vehicle, bicycle, and pedestrian improvements identified above, the Specific Plan includes a number of project design features outlined in Section 5.16.7 to reduce vehicle trips. PDF-1 requires the City to establish a Transportation Management Association (TMA) with the authority to implement strategies pertaining to trip reduction through transportation demand management (TDM; PDF-2).

In January 2017, a TDM Plan was drafted to reduce reliance on automobiles, congestion and associated emissions. The TDM Plan is provided as Appendix J2 of this DEIR and addresses the effectiveness of TDM goals and measures; establishes the strategy to meet the TDM goals, the monitoring framework, and implementation of the TMA. The goal of the TDM Plan is to reduce project generated AM and PM peak hour trips by 10 percent.

### Project Trip Generation

The proposed Project would generate additional vehicular travel in the study area. Given the mixed-use nature of the site, it would not generate traffic in a similar manner as traditional development sites. Therefore, the trip generation analysis considers the combined effects of the Project's mix of land uses, regional location, demographics, and development scale. The analysis utilized the MXD methodology (or mixed-use development trip generation) to calculate Project-related trips. This methodology is described in detail on pages 31 to 36 of the TIA (see Appendix J1). Table 5.16-5 summarizes the existing and proposed trip generation.

**Table 5.16-5 Project Trip Generation Estimates**

Trips <sup>1</sup>	Daily	AM Peak	PM Peak
Proposed Project	96,299	4,795	7,758
Existing Land Uses	65,731	3,047	5,299
<b>Net Trips</b>	<b>30,568</b>	<b>1,748</b>	<b>2,459</b>

Source: Fehr & Peers 2017a.

<sup>1</sup> All trips are net external as shown on Tables 4-2 and 4-4 of the TIA.

The net change would result in an increase of 30,568 daily trip ends, of which 1,748 would occur in the AM peak hour and 2,459 in the PM peak hour. Project trips were assigned to the study area roadway network based on the trip generation and distribution estimates developed for the Project. The distribution was based on the likely approach and departure routes to and from the study area using multiple sources—the location of complementary land uses, existing traffic volumes on study roadways, and the 2010 Longitudinal Employer-Household Dynamics Origin Destination Employment Statistics to provide insight into local travel patterns. The Project trip distribution is



5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

shown in Figure 4-1 of the TIA, and the assignment of “Project only” trips is shown in Figure 4-2 of the TIA (see Appendix J1).

**Existing with Project Conditions**

Intersection LOS results for Existing (2015) with Project conditions are summarized in Table 5.16-6. As shown in the table, thirteen of the study intersections would operate at unacceptable levels of service. In addition to the nine intersections identified as deficient under existing conditions shown on Table 5.16-2, the following would be deficient under existing plus project conditions:

- 6. Bellflower Boulevard & 7th Street: AM and PM Peak Hour
- 12. Pacific Coast Highway & Loynes Drive: PM Peak Hour
- 17. Shopkeeper Road & 2nd Street: PM Peak Hour
- 19. Seal Beach & 2nd Street/Westminster Boulevard: PM Peak Hour

Table 5.16-7 shows the increase in V/C due to the Project, which determines if a significant impact would occur according to the applicable agency thresholds for significance. As shown in Table 5.16-7, eleven study intersections are forecast to result in a significant impact for Existing With Project Conditions, which are listed below:

- 3. Westbound Ramps: SR-22 & Studebaker Road: AM Peak Hour (LOS D), PM Peak Hour (LOS F)
- 4. Ximeno Avenue & 7th Street: AM Peak Hour (LOS E), PM Peak Hour (LOS E)
- 5. Pacific Coast Highway & 7th Street: AM Peak Hour (LOS D), PM Peak Hour (LOS E)
- 6. Bellflower Boulevard & 7th Street: AM Peak Hour (LOS D), PM Peak Hour (LOS D)
- 7. Channel Drive & 7th Street: PM Peak Hour (LOS E)
- 12. Pacific Coast Highway & Loynes Drive: PM Peak Hour (LOS E)
- 16. Pacific Coast Highway & 2nd Street : AM Peak Hour (LOS E), PM Peak Hour (LOS F)
- 17. Shopkeeper Road & 2nd Street: PM Peak Hour (LOS F)
- 19. 2nd Street/Westminster and Seal Beach Boulevard: PM Peak Hour (LOS E)

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- 26. 7th Street & Park Avenue- AM Peak Hour (LOS E), PM Peak Hour (LOS E)
- 27. 2nd Street & Bay Shore Ave Avenue- PM Peak Hour (LOS F)

**Table 5.16-6 Intersection Level of Service for Existing With Project Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
1. Studebaker Rd & I-405 Northbound On-Ramp <sup>3</sup>	Signal	15.1	B	13.4	B
2. Studebaker Rd & I-405 Southbound Off-Ramp <sup>4</sup>	Side-Street Stop	13.2	B	13.4	B
3. Studebaker Rd & SR-22 Westbound Ramps	Signal	40.2	D	>80.0	F
4. 7th St & Ximeno Ave	Signal	0.905	E	0.957	E
5. Pacific Coast Hwy & 7th St	Signal	52.5	D	78.2	E
6. Bellflower Blvd & 7th St	Signal	39.5	D	40.6	D
7. Channel Dr & 7th St	Signal	7.3	A	77.1	E
8. Campus Dr & 7th St3	Signal	22.9	C	21.1	C
9. Bellflower Blvd & Pacific Coast Hwy	Signal	27.2	C	31.0	C
10. Channel Dr & Pacific Coast Hwy	Signal	12.3	B	10.8	B
11. Studebaker & SR-22 Eastbound Ramps	Signal	5.9	A	6.1	A
12. Pacific Coast Hwy & Loynes Dr	Signal	29.0	C	>80.0	F
13. Studebaker Rd & Loynes Dr	Signal	0.691	B	0.817	D
14. 2nd St & Naples Plaza	Signal	0.662	B	0.787	C
15. Marina Dr & 2nd St	Signal	0.655	B	0.852	D
16. Pacific Coast Hwy & 2nd St	Signal	75.6	E	>80.0	F
17. Shopkeeper Rd & 2nd St	Signal	0.738	C	1.002	F
18. Studebaker Rd & 2nd St	Signal	0.738	C	0.883	D
19. 2nd St/Westminster Blvd & Seal Beach Blvd	Signal	0.585	A	0.901	E
20. Pacific Coast Hwy & Studebaker Rd	Signal	20.7	C	39.9	D
21. Pacific Coast Hwy & 1st St	Signal	14.9	B	17.0	B
22. Pacific Coast Hwy & Seal Beach	Signal	0.939	E	0.831	D

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-6 Intersection Level of Service for Existing With Project Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
Blvd					
23. 1st St. & Marina Dr.	All-Way Stop	8.9	A	10.7	B
24. SR-22 & Studebaker Rd & College Park Dr	Side-Street Stop	18.8	C	<b>78.9</b>	<b>F</b>
25. 7th St & Santiago Av	Signal	0.731	C	0.794	C
26. 7th St & Park Av	Signal	<b>1.007</b>	<b>F</b>	<b>0.994</b>	<b>E</b>
27. 2nd St & Bay Shore Av	Signal	0.884	D	<b>1.351</b>	<b>F</b>
28. 2nd St & Livingston Dr	Signal	0.705	C	0.663	B

Source: Fehr & Peers 2017a.

Notes: V/C = Volume / Capacity Ratio

Intersections operating below acceptable LOS are shown in **bold**.

<sup>1</sup> V/C for signalized intersections based on ICU methodology using Traffix 7.9 software.

<sup>2</sup> Delay for unsignalized intersections based on HCM 2010 methodology using Synchro 8 Build 806 software. Delay for side-street stop is reported as the worst-case approach delay.

<sup>3</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze intersections with exclusive pedestrian phases.

<sup>4</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze stop-controlled intersections with exclusive and shared turn lanes.

**Table 5.16-7 Existing With Project Intersection Impact Summary**

Intersection	Control	Peak Hour	No Project		With Project			Significant Impact?
			V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	Project Change	
3. Studebaker Rd & SR-22 Westbound Ramps	Signal	AM	30.6	C	<b>40.2</b>	<b>D</b>	9.6	Yes
		PM	<b>&gt;80.0</b>	<b>F</b>	<b>&gt;80.0</b>	<b>F</b>	N/A	Yes
4. Ximeno Ave & 7th St	Signal	AM	0.899	D	<b>0.905</b>	<b>E</b>	0.006	Yes
		PM	<b>0.91</b>	<b>E</b>	<b>0.957</b>	<b>E</b>	0.047	Yes
5. Pacific Coast Hwy & 7th St	Signal	PM	<b>59.6</b>	<b>E</b>	<b>78.2</b>	<b>E</b>	18.6	Yes

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-7 Existing With Project Intersection Impact Summary

Intersection	Control	Peak Hour	No Project		With Project			Significant Impact?
			V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	Project Change	
6. Bellflower Blvd & 7th St	Signal	AM	34.1	C	39.5	D	5.4	Yes
		PM	32.8	C	40.6	D	7.8	Yes
7. Channel Dr & 7th St	Signal	PM	61.0	E	77.1	E	16.1	Yes
12. Pacific Coast Hwy & Loynes Dr	Signal	PM	38.3	D	>80.0	F	-	Yes
16. Pacific Coast Hwy & 2nd St	Signal	AM	56.5	E	75.6	E	19.1	Yes
		PM	68.8	E	>80.0	F	-	Yes
17. Shopkeeper Rd & 2nd St	Signal	PM	0.788	C	1.002	F	0.214	Yes
19. Seal Beach Blvd & 2nd St/Westminster Blvd	Signal	PM	0.857	D	0.901	E	0.044	Yes
22. Pacific Coast Hwy & Seal Beach Blvd.	Signal	AM	0.931	E	0.939	E	0.008	No
24. SR-22/Studebaker Rd & College Park Dr	Side-Street Stop-Control	PM	46.1	E	78.9	F	32.8	No <sup>3</sup>
26. 7th St. & Park Ave.	Signal	AM	0.959	E	1.007	F	0.048	Yes
		PM	0.913	F	0.997	E	0.084	Yes
27. 2nd St. & Bay Shore Ave.	Signal	PM	1.004	F	1.086	F	0.082	Yes

Source: Fehr & Peers 2017a.

Notes: V/C = Volume / Capacity Ratio

Intersections operating below acceptable LOS are shown in **bold**

<sup>1</sup> V/C for signalized intersections based on ICU methodology using Traffix 7.9 software.

<sup>2</sup> Delay for unsignalized intersections based on HCM 2010 methodology using Synchro 8 Build 806 software.

<sup>3</sup> Highway Capacity Manual 2010 methodology cannot accurately estimate the change in delay for intersections operating at an average delay of 80 seconds or more.

<sup>4</sup> Does not satisfy the Peak Hour Volume Warrant for Traffic Signal installation.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Cumulative Year (2035) Without Project Conditions**

*Assumptions*

Future volumes for Cumulative Year (2035) Without and With Project conditions were developed using a 0.505 percent per year growth rate, consistent with the Los Angeles County CMP Guidelines. The growth rate accounts for pending and approved projects in the City of Long Beach as well as regional growth anticipated by Year 2035. Cumulative Year (2035) Without Project AM and PM peak hour traffic volumes for study intersections are shown on Figure 5-1 of the TIA (see Appendix J1).

The City of Long Beach has the following approved and pending development projects:

- Consolidated Coastal Development will remove and consolidate existing industrial operations at the Synergy Oil Field.
- AES Battery grid energy storage facility will be constructed along Studebaker Road north of the existing AES facility.
- Light Industrial Development on Studebaker Road will zone for commercial/industrial uses, but the project has been stalled since September 2014.
- The existing Seaport Marina Hotel will be demolished, and a commercial center with retail and restaurant space will be constructed at the corner of 2nd St & Pacific Coast Highway.
- The Belmont Pool Revitalization Project will involve construction and operation of a replacement pool complex at Olympic Plaza that will provide permanent indoor seating for approximately 1,250 spectators and temporary outdoor seating for up to 3,000 spectators.

Although these are pending or approved projects, the City of Long Beach directed the traffic consultant (Fehr & Peers) to consider only the Seaport Marina Hotel demolition and commercial center construction as a pending and approved project. All other project traffic is considered in buildout growth.

The City of Seal Beach also directed Fehr & Peers to add another approved and pending development project:

- 28-home residential subdivision southwest of 1st Street & Pacific Coast Highway.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*Intersection LOS*

Intersection LOS results for Cumulative Year (2035) Without Project conditions are summarized in Table 5.16-8.

**Table 5.16-8 Intersection Level of Service for Cumulative Year (2036) Without Project Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
1. Studebaker Rd & I-405 Northbound On-Ramp <sup>3</sup>	Signal	9.2	A	11.8	B
2. Studebaker Rd & I-405 Southbound Off-Ramp <sup>4</sup>	Side-Street Stop	13.2	B	14.3	B
3. Studebaker Rd & SR-22 Westbound Ramps	Signal	<b>36.9</b>	<b>D</b>	<b>&gt;80.0</b>	<b>F</b>
4. 7th St & Ximeno Ave	Signal	<b>0.995</b>	<b>E</b>	<b>1.017</b>	<b>F</b>
5. Pacific Coast Hwy & 7th St	Signal	<b>&gt;80.0</b>	<b>F</b>	<b>&gt;80.0</b>	<b>F</b>
6. Bellflower Blvd & 7th St	Signal	<b>48.4</b>	<b>D</b>	<b>51.0</b>	<b>D</b>
7. Channel Dr & 7th St	Signal	10.4	B	<b>&gt;80.0</b>	<b>F</b>
8. Campus Dr & 7th St <sup>3</sup>	Signal	<b>40.8</b>	<b>D</b>	32.6	C
9. Bellflower Blvd & Pacific Coast Hwy	Signal	28.8	C	31.6	C
10. Channel Dr & Pacific Coast Hwy	Signal	15.1	B	11.6	B
11. Studebaker & SR-22 Eastbound Ramps	Signal	6.8	A	7.4	A
12. Pacific Coast Hwy & Loynes Dr	Signal	30.3	C	<b>57.7</b>	<b>E</b>
13. Studebaker Rd & Loynes Dr	Signal	0.672	B	0.809	D
14. 2nd St & Naples Plaza	Signal	0.724	C	0.833	D
15. Marina Dr & 2nd St	Signal	0.672	B	0.844	D
16. Pacific Coast Hwy & 2nd St	Signal	<b>69.8</b>	<b>E</b>	<b>&gt;80.0</b>	<b>F</b>
17. Shopkeeper Rd & 2nd St	Signal	0.655	B	0.900	D
18. Studebaker Rd & 2nd St	Signal	0.686	B	0.896	D
19. 2nd St/Westminster Blvd & Seal Beach Blvd	Signal	0.634	B	<b>0.948</b>	<b>E</b>
20. Pacific Coast Hwy & Studebaker Rd	Signal	17.3	B	<b>56.9</b>	<b>E</b>
21. Pacific Coast Hwy & 1st St	Signal	19.5	B	19.3	B

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-8 Intersection Level of Service for Cumulative Year (2036) Without Project Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
22. Pacific Coast Hwy & Seal Beach Blvd.	Signal	<b>1.042</b>	<b>F</b>	0.888	D
23. 1st St. & Marina Dr.	All-Way Stop	9.3	A	11.8	B
24. SR-22 at& Studebaker Rd & College Park Dr	Side-Street Stop	20.6	C	<b>73.7</b>	<b>F</b>
25. 7th St. & Santiago Ave.	Signal	0.772	C	0.844	D
26. 7th St. & Park Ave.	Signal	<b>1.146</b>	<b>F</b>	<b>1.102</b>	<b>F</b>
27. 2nd St. & Bay Shore Ave.	Signal	<b>1.019</b>	<b>F</b>	<b>1.125</b>	<b>F</b>
28. 2nd St. & Livingston Dr.	Signal	0.731	C	0.687	C

Source: Fehr & Peers 2017a.

Notes: V/C = Volume / Capacity Ratio

Intersections operating below acceptable LOS are shown in bold.

<sup>1</sup> V/C for signalized intersections based on ICU methodology using Traffix 7.9 software.

<sup>2</sup> Delay for unsignalized intersections based on HCM 2010 methodology using Synchro 8 Build 806 software. Delay for side-street stop is reported as the worst-case approach delay.

<sup>3</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze intersections with exclusive pedestrian phases.

<sup>4</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze stop-controlled intersections with exclusive and shared turn lanes.

Fourteen intersections are expected to operate at a deficient LOS during one or more peak hours for Cumulative Year (2035) Without Project Conditions:

- 3. Studebaker Road & SR-22 Westbound Ramps: AM Peak Hour (LOS D), PM Peak Hour (LOS F)
- 4. Ximeno Avenue & 7th Street: AM Peak Hour (LOS E), PM Peak Hour (LOS F)
- 5. Pacific Coast Highway & 7th Street: AM Peak Hour (LOS F), PM Peak Hour (LOS F)
- 6. Bellflower Boulevard & 7th Street: AM Peak Hour (LOS D), PM Peak Hour (LOS D)
- 7. Channel Drive & 7th Street: PM Peak Hour (LOS F)

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- 8. Campus Drive & 7th Street: AM Peak Hour (LOS D)
- 12. Pacific Coast Highway & Loynes Drive: PM Peak Hour (LOS E)
- 16. Pacific Coast Highway & 2nd Street: AM Peak Hour (LOS E), PM Peak Hour (LOS F)
- 19. Seal Beach Boulevard & 2nd Street/Westminster Boulevard: PM Peak Hour (LOS E)
- 20. Pacific Coast Highway & Studebaker Road: PM Peak Hour (LOS E)
- 22. Pacific Coast Highway & Seal Beach Boulevard: AM Peak Hour (LOS F), PM Peak Hour (LOS F)
- 24. SR-22 at Studebaker Road & College Park Drive: PM Peak Hour (LOS F)
- 26. 7th Street & Park Avenue: AM Peak Hour (LOS F), PM Peak Hour (LOS F)
- 27. 2nd Street & Bay Shore Avenue: AM Peak Hour (LOS F), PM Peak Hour (LOS F)

### Cumulative Year (2035) With Project Conditions

To estimate Cumulative Year With Project traffic volumes, the Project-only volumes were added to Cumulative Year Without Project traffic volumes based on the trip generation and trip distribution assumptions discussed previously, shown in Figure 4-2 of the TIA (see Appendix J1). Intersection LOS results for Cumulative Year With Project Conditions are summarized in Table 5.16-9. Nineteen intersections are forecast to operate at a deficient LOS during one or more peak hours for Cumulative Year (2035) With Project Conditions. In addition to the intersections identified to operate at deficient LOS under Cumulative Without Project conditions, the following intersections would be deficient under Cumulative Year With Project conditions:

- 11. Studebaker Road & SR-22 Eastbound Ramps
- 13. Studebaker Road & Loynes Drive
- 15. Marina Drive & 2nd Street
- 17. Shopkeeper Road & 2nd Street
- 18. Studebaker Road & 2nd Street



5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-9 Intersection Level of Service for Cumulative Year (2035) With Project Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
1. Studebaker Rd & I-405 Northbound On-Ramp <sup>3</sup>	Signal	15.7	B	14.3	B
2. Studebaker Rd & I-405 Southbound Off-Ramp <sup>4</sup>	Side-Street Stop	13.7	B	15.5	C
3. Studebaker Rd & SR-22 Westbound Ramps	Signal	<b>47.1</b>	<b>D</b>	<b>&gt;80.0</b>	<b>F</b>
4. 7th St & Ximeno Ave	Signal	<b>0.999</b>	<b>E</b>	<b>1.068</b>	<b>F</b>
5. Pacific Coast Hwy & 7th St	Signal	<b>&gt;80.0</b>	<b>F</b>	<b>&gt;80.0</b>	<b>F</b>
6. Bellflower Blvd & 7th St	Signal	<b>55.6</b>	<b>E</b>	<b>63.6</b>	<b>E</b>
7. Channel Dr & 7th St	Signal	11.2	B	<b>&gt;80.0</b>	<b>F</b>
8. Campus Dr & 7th St <sup>3</sup>	Signal	<b>50.6</b>	<b>D</b>	35.3	D
9. Bellflower Blvd & Pacific Coast Hwy	Signal	29.3	C	38.8	D
10. Channel Dr & Pacific Coast Hwy	Signal	11.6	B	14.8	B
11. Studebaker & SR-22 Eastbound Ramps	Signal	6.5	A	<b>39.9</b>	<b>D</b>
12. Pacific Coast Hwy & Loynes Dr	Signal	30.4	C	<b>&gt;80.0</b>	<b>F</b>
13. Studebaker Rd & Loynes Dr	Signal	0.741	C	<b>0.922</b>	<b>E</b>
14. 2nd St & Naples Plaza	Signal	0.728	C	0.872	D
15. Marina Dr & 2nd St	Signal	0.716	C	<b>0.979</b>	<b>E</b>
16. Pacific Coast Hwy & 2nd St	<b>Signal</b>	<b>&gt;80.0</b>	<b>F</b>	<b>&gt;80.0</b>	<b>F</b>
17. Shopkeeper Rd & 2nd St	Signal	0.812	D	<b>1.130</b>	<b>F</b>
18. Studebaker Rd & 2nd St	Signal	0.798	C	<b>0.996</b>	<b>E</b>
19. 2nd St/Westminster Blvd & Seal Beach Blvd	Signal	0.643	B	<b>1.005</b>	<b>F</b>
20. Pacific Coast Hwy & Studebaker Rd	Signal	25.2	C	<b>74.9</b>	<b>E</b>
21. Pacific Coast Hwy & 1st St	Signal	19.2	B	47.7	D
22. Pacific Coast Hwy & Seal Beach Blvd.	Signal	<b>1.058</b>	<b>F</b>	<b>0.973</b>	<b>E</b>
23. 1st St. & Marina Dr.	All-Way Stop	9.6	B	12.7	B
24. SR-22 at Studebaker Rd & College Park Dr	Side-Street Stop	22.3	C	<b>&gt;80.0</b>	<b>F</b>

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-9 Intersection Level of Service for Cumulative Year (2035) With Project Conditions**

Intersection	Control	AM Peak Hour		PM Peak Hour	
		V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS
25. 7th St. & Santiago Ave.	Signal	0.799	C	0.869	D
26. 7th St. & Park Ave.	Signal	<b>1.198</b>	<b>F</b>	<b>1.096</b>	<b>F</b>
27. 2nd St. & Bay Shore Ave.	Signal	<b>1.041</b>	<b>F</b>	<b>1.206</b>	<b>F</b>
28. 2nd St. & Livingston Dr.	Signal	0.816	D	0.688	C

Source: Fehr & Peers 2017a.

Notes: V/C = Volume / Capacity Ratio

Intersections operating below acceptable LOS are shown in **bold**.

<sup>1</sup> V/C for signalized intersections based on ICU methodology using Traffix 7.9 software.

<sup>2</sup> Delay for unsignalized intersections based on HCM 2010 methodology using Synchro 8 Build 806 software. Delay for side-street stop is reported as the worst-case approach delay.

<sup>3</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze intersections with exclusive pedestrian phases.

<sup>4</sup> Analyzed using HCM 2000 because HCM 2010 does not analyze stop-controlled intersections with exclusive and shared turn lanes.

Table 5.16-10 shows the increase in V/C due to the Project, which determines if a significant impact would occur according to the applicable agency thresholds for significance. As shown in Table 5.16-10, 18 study intersections are forecast to result in a significant impact for 2035 With Project Conditions:

- 3. Studebaker Road & SR-22 Westbound Ramps (Caltrans): AM Peak Hour (LOS D), PM Peak Hour (LOS F)
- 4. Ximeno Avenue & 7th Street: PM Peak Hour (LOS F)
- 5. Pacific Coast Highway & 7th Street (Caltrans): AM Peak Hour (LOS F), PM Peak Hour (LOS F)
- 6. Bellflower Boulevard & 7th Street (Caltrans): AM Peak Hour (LOS E), PM Peak Hour (LOS E)
- 7. Channel Drive & 7th Street (Caltrans): PM Peak Hour (LOS F)
- 8. Campus Drive & 7th Street (Caltrans): AM and PM Peak Hour (LOS D)

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- 11. Studebaker Rd & SR-22 Eastbound Ramps (Caltrans): PM Peak Hour (LOS D)
- 12. Pacific Coast Highway & Loynes Drive (Caltrans): PM Peak Hour (LOS F)
- 13. Studebaker Road & Loynes Drive: PM Peak Hour (LOS E)
- 15. Marina Drive & 2nd Street: PM Peak Hour (LOS E)
- 16. Pacific Coast Highway & 2nd Street (Caltrans): AM Peak Hour (LOS F), PM Peak Hour (LOS F)
- 17. Shopkeeper Road & 2nd Street: PM Peak Hour (LOS F)
- 18. Studebaker Road & 2nd Street: PM Peak Hour (LOS E)
- 19. Seal Beach Boulevard & 2nd St/Westminster Boulevard (City of Seal Beach): PM Peak Hour (LOS F)
- 20. Pacific Coast Highway & Studebaker Road (Caltrans): PM Peak Hour (LOS E)
- 22. Pacific Coast Highway & Seal Beach Boulevard (Caltrans): AM Peak Hour (LOS F), PM Peak Hour (LOS E)
- 26. 7th Street & Park Avenue: AM Peak Hour (LOS F), PM Peak Hour (LOS F)
- 27. 2nd Street & Bay Shore Avenue: -AM Peak Hour (LOS F), PM Peak Hour (LOS F)

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-10 Cumulative 2035 With Project Intersection Impact Summary

Intersection	Control	Peak Hour	No Project		With Project			Significant Impact?
			V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	Project Change	
3. Studebaker Rd & SR-22 Westbound Ramps	Signal	AM	36.9	D	47.1	D	10.2	Yes
		PM	>80.0	F	>80.0	F	N/A	Yes
4. Ximeno Ave & 7th St	Signal	AM	0.995	E	0.999	F	0.004	No
		PM	1.017	F	1.068	F	0.051	Yes
5. Pacific Coast Hwy & 7th St	Signal	AM	>80.0	F	>80.0	F	N/A	Yes
		PM	>80.0	F	>80.0	F	N/A	Yes
6. Bellflower Blvd & 7th St	Signal	AM	48.4	D	55.6	E	7.2	Yes
		PM	51.0	D	63.6	E	12.6	Yes
7. Channel Dr & 7th St	Signal	PM	>80.0	F	>80.0	F	N/A	Yes
8. Campus Dr & 7th St	Signal	AM	40.8	D	50.0	D	9.2	Yes
		PM	32.6	C	35.3	D	2.7	Yes
11. Studebaker Rd & Eastbound Ramps	Signal	PM	7.4	A	39.9	D	28.3	Yes
12. Pacific Coast Hwy & Loynes Dr	Signal	PM	57.7	E	>80.0	F	N/A	Yes
13. Studebaker Rd & Loynes Dr	Signal	PM	0.809	D	0.914	E	0.105	Yes
15. Marina Dr & 2nd St	Signal	PM	0.844	D	0.980	E	0.136	Yes
16. Pacific Coast Hwy & 2nd St	Signal	AM	69.8	E	>80.0	F	N/A	Yes
		PM	>80.0	F	>80.0	F	N/A	Yes
17. Shopkeeper Rd & 2nd St	Signal	PM	0.900	E	1.140	F	0.240	Yes
18. Studebaker Rd & 2nd St	Signal	PM	0.896	D	0.992	F	0.085	Yes

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-10 Cumulative 2035 With Project Intersection Impact Summary**

Intersection	Control	Peak Hour	No Project		With Project			Significant Impact?
			V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	V/C <sup>1</sup> or Delay <sup>2</sup>	LOS	Project Change	
19. Seal Beach Blvd & 2nd St/Westminster Blvd	Signal	PM	0.948	E	1.005	F	0.057	Yes
20. Pacific Coast Hwy & Studebaker Rd	Signal	PM	56.9	E	75.1	E	18.2	Yes
22. Pacific Coast Hwy & Seal Beach Blvd	Signal	AM	1.042	F	1.058	F	0.016	No
		PM	0.888	D	0.973	E	0.085	Yes
24. SR-22 at Studebaker Rd & College Park Dr	Side-Street Stop	PM	73.7	F	>80.0	F	N/A	No <sup>3</sup>
26. 7th St & Park Ave	Signal	AM	1.146	F	1.198	F	0.05	Yes
		PM	1.102	F	1.187	F	0.085	Yes
27. 2nd St. & Bay Shore Ave	Signal	AM	1.026	F	1.048	E	0.022	Yes
		PM	1.004	F	1.086	F	0.081	Yes

Source: Fehr & Peers 2017a.

Notes: V/C = Volume / Capacity Ratio

<sup>1</sup> V/C for signalized intersections based on ICU methodology using Traffix 7.9 software.

<sup>2</sup> Delay for unsignalized intersections based on HCM 2010 methodology using Synchro 8 Build 806 software. Delay for side-street stop is reported as the worst-case approach delay.

<sup>3</sup> Intersection does not satisfy the Peak Hour Volume Warrant for Traffic Signal Installation.

**Construction Traffic**

Construction activities associated with individual development projects within the Project area would include site demolition/preparation, grading, excavation, fine grading, building construction, and infrastructure improvements. Construction related trips associated with these activities would include trucks associated with import or export of soils, vendor and worker trips. It is expected that large construction equipment, such as excavators, dump trucks, cranes, and tractors, would be used

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

during construction activities. Construction trips would access the Project area via regional facilities—the SR-22, I-605, I-405, PCH, and 7th Street—and local streets, such as Studebaker Road, 2nd Street and PCH.

The proposed Project includes the adoption of the Specific Plan with buildout assumed to occur over an approximate 20 year period. No site specific development is being proposed at this time and construction phasing is dependent on a variety of factors, including market demand. Additionally, the size of any particular development or developments and anticipated construction schedule is unknown. Therefore, construction trip generation associated with future development under the proposed Specific Plan is unknown at this time. However, the construction trip generation is anticipated to be well within the net increase in trip generation associated with buildout of the proposed Project. Therefore, impacts to the surrounding circulation system and intersections have been addressed in the analysis above under the Existing With Project and Cumulative 2035 With Project scenarios. Temporary construction impacts at Project area intersections would be significant.

Since future development would largely consist of redevelopment of existing uses, temporary construction impacts could also result from conflicts with nearby existing businesses and residences. For example, oversized vehicles may traveling at lower speeds, construction trips could travel during peak hours, staging locations could impact routes and safety, and closure of parking lots or access roads may occur. Such delays and potential conflicts would be temporary, but have the potential to result in a significant impact.

---

### Impact 5.16-2: Project-related trip generation would impact levels of service for the freeway system. [Threshold T-1]

---

**Impact Analysis:** Traffic impacts to the freeway system were evaluated using the criteria in the Caltrans Guide for the Preparation of Traffic Impact Studies (2002) for freeway mainline and ramp facilities.

#### Existing With Project Conditions

As shown in Table 5.16-11, the following freeway segments, off-ramps, and on-ramps would operate at a deficient LOS during the peak hours for Existing (2015) With Project Conditions:

- Westbound SR-22: AM Peak Hour (LOS F), PM Peak Hour (LOS E)
- Studebaker Off-Ramp: PM Peak Hour (LOS D)
- Studebaker On-Ramp: AM Peak Hour (LOS D), PM Peak Hour (LOS D)
- Eastbound SR-22: AM Peak Hour (LOS E), PM Peak Hour (LOS D)

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Northbound I-405 from Studebaker Road to Cherry Avenue: AM and PM Peak Hour (LOS F)
- Southbound I-405 from Cherry Avenue to Studebaker Road: AM and PM Peak Hour (LOS F)
- I-405 Southbound North of Studebaker Road: AM Peak Hour (LOS E), PM Peak Hour (LOS F)
- Northbound I-605 from I-405 to Katella Avenue: AM Peak Hour (LOS E), PM Peak Hour (LOS F)
- Northbound I-605 from Katella Avenue to Carson Avenue: AM and PM Peak Hour (LOS F)
- Southbound I-605 from Carson Avenue to I-405: AM and PM Peak Hour (LOS F)

Compared to existing conditions, the Studebaker Off-Ramp, and the mainline segment of Southbound I-605 from Katella Avenue to I-405 become deficient under existing plus project conditions. Given that the Project add traffic to congested local freeway facilities, this is considered a significant impact.

**Table 5.16-11 Freeway Mainline and Ramps Operations, Existing With Project**

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
<b>I-405 Northbound</b>					
I-405 Northbound North of Studebaker	Basic	-	F	-	F
Studebaker On-Ramp	Basic	-	F	-	F
Palo Verde Ave to Woodruff Ave	Basic	-	F	-	F
Woodruff Ave to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Lakewood Blvd	Basic	-	F	-	F
Lakewood Blvd to Spring St	Basic	-	F	-	F
Spring St to Cherry Ave	Basic	-	F	-	F
<b>I-405 Southbound</b>					
Cherry Ave to Spring St	Basic	-	F	-	F
Lakewood Blvd to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Woodruff Ave	Basic	-	F	-	F
Woodruff to Palo Verde Ave	Basic	-	F	-	F
Palo Verde Ave to Studebaker Rd	Basic	-	F	-	F
Studebaker Off-Ramp	Basic	-	F	-	F
I-405 Southbound North of Studebaker	Basic	42.4	E	-	F

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-11 Freeway Mainline and Ramps Operations, Existing With Project

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
<b>I-605 Northbound</b>					
I-405 to Katella Ave	Basic	<b>37.8</b>	E	-	F
Katella Ave to Spring St	Basic	-	F	-	F
Spring St to Carson Ave	Basic	-	F	-	F
<b>I-605 Southbound</b>					
Carson Ave to Spring St	Basic	-	F	-	F
Spring St to Katella Ave	Basic	-	F	-	F
Katella Ave to I-405	Basic	-	F	-	F
<b>SR-22 Westbound</b>					
Westbound SR-22	Basic	<b>45.0</b>	F	<b>39.7</b>	E
Studebaker Off-Ramp	Diverge	<b>30.5</b>	D	27.6	C
<b>SR-22 Eastbound</b>					
Studebaker On-Ramp	Merge	<b>34.2</b>	D	<b>30.9</b>	D
Eastbound SR-22	Basic	<b>41.1</b>	E	<b>34.3</b>	D

Source: Fehr & Peers, 2017a.

Notes: Pc/mi/ln = passenger cars per mile per lane.

Freeway facilities operating below acceptable LOS are shown in **bold**.

Calculations were made using Highway Capacity Manual 2010 methodologies.

Density is not reported for segments operating at LOS F

**Cumulative (2035) Freeway Operations**

As shown in Table 5.16-12, the following freeway segments, off-ramps, and on-ramps would operate at a deficient LOS during the peak hours for Cumulative (2035) Without Project Conditions:

- Westbound SR-22: AM Peak Hour (LOS D), PM Peak Hour (LOS F)
- Studebaker Off-Ramp: PM Peak Hour (LOS D)
- Studebaker On-Ramp: AM Peak Hour (LOS D), PM Peak Hour (LOS D)
- Eastbound SR-22: AM Peak Hour (LOS E), PM Peak Hour (LOS D)
- Northbound I-405 from Studebaker Road to Cherry Avenue: AM and PM Peak Hour (LOS F)



5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Southbound I-405 from Cherry Avenue to Studebaker Road: AM and PM Peak Hour (LOS F)
- Northbound I-605 from Katella Ave to I-405 to Carson Avenue: AM and PM Peak Hour (LOS F)
- Southbound I-605 from Carson Avenue to I-405: AM and PM Peak Hour (LOS F)

**Table 5.16-12 Freeway Mainline and Ramps Operations, Cumulative Without Project**

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
<b>I-405 Northbound</b>					
I-405 Northbound North of Studebaker	Basic	-	F	-	F
Studebaker On-Ramp	Basic	-	F	-	F
Palo Verde Ave to Woodruff Ave	Basic	-	F	-	F
Woodruff Ave to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Lakewood Blvd	Basic	-	F	-	F
Lakewood Blvd to Spring St	Basic	-	F	-	F
Spring St to Cherry Ave	Basic	-	F	-	F
<b>I-405 Southbound</b>					
Cherry Ave to Spring St	Basic	-	F	-	F
Lakewood Blvd to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Woodruff Ave	Basic	-	F	-	F
Woodruff to Palo Verde Ave	Basic	-	F	-	F
Palo Verde Ave to Studebaker Rd	Basic	-	F	-	F
Studebaker Off-Ramp	Basic	-	F	-	F
I-405 Southbound North of Studebaker	Basic	-	F	-	F
<b>I-605 Northbound</b>					
I-405 to Katella Ave	Basic	-	F	-	F
Katella Ave to Spring St	Basic	-	F	-	F
Spring St to Carson Ave	Basic	-	F	-	F
<b>I-605 Southbound</b>					
Carson Ave to Spring St	Basic	-	F	-	F
Spring St to Katella Ave	Basic	-	F	-	F
Katella Ave to I-405	Basic	-	F	-	F
<b>SR-22 Westbound</b>					
Westbound SR-22	Basic	33.7	D	-	F

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-12 Freeway Mainline and Ramps Operations, Cumulative Without Project

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
Studebaker Off-Ramp	Diverge	27.2	C	29.4	D
<b>SR-22 Eastbound</b>					
Studebaker On-Ramp	Merge	<b>34.3</b>	<b>D</b>	32.0	D
Eastbound SR-22	Basic	<b>37.0</b>	<b>E</b>	32.0	D

Source: Fehr & Peers, 2017a.

Notes: Pc/mi/ln = passenger cars per mile per lane.

Freeway facilities operating below acceptable LOS are shown in **bold**.

Calculations were made using Highway Capacity Manual 2010 methodologies.

Density is not reported for segments operating at LOS F

As shown in Table 5.16-13, the same freeway segments, off-ramps, and on-ramps listed above under Cumulative Without Project conditions would operate at a deficient LOS during the peak hours for Cumulative (2035) With Project Conditions. Additionally, the Studebaker Off-Ramp would worsen from a PM Peak Hour of LOS D to LOS F.

Table 5.16-13 Freeway Mainline and Ramps Operations, Cumulative With Project

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
<b>I-405 Northbound</b>					
I-405 Northbound North of Studebaker	Basic	-	F	-	F
Studebaker On-Ramp	Basic	-	F	-	F
Palo Verde Ave to Woodruff Ave	Basic	-	F	-	F
Woodruff Ave to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Lakewood Blvd	Basic	-	F	-	F
Lakewood Blvd to Spring St	Basic	-	F	-	F
Spring St to Cherry Ave	Basic	-	F	-	F
<b>I-405 Southbound</b>					
Cherry Ave to Spring St	Basic	-	F	-	F
Lakewood Blvd to Bellflower Blvd	Basic	-	F	-	F
Bellflower Blvd to Woodruff Ave	Basic	-	F	-	F
Woodruff to Palo Verde Ave	Basic	-	F	-	F

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-13 Freeway Mainline and Ramps Operations, Cumulative With Project**

Segment	Type	AM		PM	
		Density (pc/mi/ln)	LOS	Density (pc/mi/ln)	LOS
Palo Verde Ave to Studebaker Rd	Basic	-	F	-	F
Studebaker Off-Ramp	Basic	-	F	-	F
I-405 Southbound North of Studebaker	Basic	-	F	-	F
<b>I-605 Northbound</b>					
I-405 to Katella Ave	Basic	-	F	-	F
Katella Ave to Spring St	Basic	-	F	-	F
Spring St to Carson Ave	Basic	-	F	-	F
<b>I-605 Southbound</b>					
Carson Ave to Spring St	Basic	-	F	-	F
Spring St to Katella Ave	Basic	-	F	-	F
Katella Ave to I-405	Basic	-	F	-	F
<b>SR-22 Westbound</b>					
Westbound SR-22	Basic	<b>33.7</b>	<b>D</b>	-	F
Studebaker Off-Ramp	Diverge	26.6	C	-	F
<b>SR-22 Eastbound</b>					
Studebaker On-Ramp	Merge	<b>34.8</b>	<b>D</b>	<b>31.9</b>	<b>D</b>
Eastbound SR-22	Basic	<b>37.0</b>	<b>E</b>	<b>32.0</b>	<b>D</b>

Source: Fehr & Peers, 2017a.

Notes: Pc/mi/ln = passenger cars per mile per lane.

Freeway facilities operating below acceptable LOS are shown in **bold**.

Calculations were made using Highway Capacity Manual 2010 methodologies.

Density is not reported for segments operating at LOS F

In general, the freeway assessment reflects the peak hour congestion that much of Southern California experiences during peak periods. Given that the project will add traffic to area freeways, the Project impact to freeway segments operating at poor levels of service is considered significant.

### Freeway Ramp Queuing Analysis

A queuing assessment was completed for the freeway ramps in the study area to ensure that traffic does not back up onto mainline freeway lanes. Ramps evaluated as part of the queuing assessment include:

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Studebaker Road & I-405 Southbound Off-Ramp
- Studebaker Road & SR-22 Eastbound Off-Ramp

Table 5.16-14 summarizes queuing under Existing Without and With Project conditions. Under these scenarios storage is not exceeded on the off-ramps in the study area, therefore impacts are considered less than significant.

**Table 5.16-14 Ramps Queues, Existing with Project**

Intersection	Movement	Storage (ft)	No Project Queue (ft)		With Project Queue (ft)	
			Am Peak Hour	PM Peak Hour	Am Peak Hour	PM Peak Hour
2. Studebaker Rd & I-405 Southbound Off-Ramp	EBL	1,050	18	11	18	11
	EBT	-	-	-	-	-
	EBR	80	31	19	39	50
11. Studebaker Rd & SR-22 Eastbound Ramps	WBL	135	17	20	18	20
	WBT	-	-	-	-	-
	WBR	-	-	-	-	-

Source: Fehr & Peers 2017a.

Table 5.16-15 summarizes the results of the queuing analyses for Cumulative (2035) Without and With Project conditions. As shown in the table, queuing is increased under the With Project scenario. However, queuing on the ramps does not exceed storage during the AM or PM peak hours. As a result, impacts are considered less than significant.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-15 Ramps Queues, Cumulative (2035), With and Without Project**

Intersection	Movement	Storage (ft)	No Project Queue (ft)		With Project Queue (ft)	
			Am Peak Hour	PM Peak Hour	Am Peak Hour	PM Peak Hour
2. Studebaker Rd & I-405 Southbound Off-Ramp	EBL	1,050	20	17	20	18
	EBT	-	-	-	-	-
	EBR	80	35	31	45	69
11. Studebaker Rd & SR-22 Eastbound Ramps	WBL	135	20	24	21	25
	WBT	-	-	-	-	-
	WBR	-	-	-	-	-

Source: Fehr & Peers 2017a.

**Impact 5.16-3: Project-related trip generation in combination with existing and proposed cumulative development would result in designated road and/or highways exceeding county congestion management agency service standards. [Threshold T-2]**

**Impact Analysis:** The CMP was created statewide as a result of Proposition 111 and has been implemented locally by Metro. The CMP in effect in Los Angeles County was issued by Metro in 2010 and requires that the traffic impact of individual development projects of potential regional significance be analyzed. The CMP system comprises a specific system of arterial roadways plus all freeways, and 164 intersections are identified for monitoring on the system in Los Angeles County. The CMP locations in the study area are the intersections of:

- Pacific Coast Highway & 7th Street
- Pacific Coast Highway & 2nd Street

According to the CMP Traffic Impact Analysis Guidelines developed by Metro, a traffic impact analysis is required if a proposed project would add 50 or more trips during either the AM or PM weekday peak hours to a CMP intersection, including freeway on- or off-ramps. For CMP-designated intersections, the acceptable LOS is E.

Since the Los Angeles CMP guidelines use the ICU methodology for assessing CMP locations, the volume-to-capacity (V/C) ratio was used for this analysis. If the proposed Project increases traffic demand on a CMP facility by 2 percent of capacity ( $V/C \geq 0.02$ ), causing LOS F ( $V/C > 1.00$ ), a

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

significant impact would occur. If the facility is already at LOS F, a significant impact occurs if the proposed Project increases traffic demand on a CMP facility by 2 percent of capacity ( $V/C \geq 0.02$ ).

Table 5.16-16 shows the LOS results for the CMP intersections. The CMP study area intersections of Pacific Coast Highway at 7th Street and Pacific Coast Highway at 2nd Street operate at an acceptable LOS during the Existing (2015) scenario, but operate deficiently in the Existing With Project, Cumulative (2035) Without Project, and Cumulative (2035) With Project scenarios. Without mitigation this would be a significant impact.

Table 5.16-16 Intersection CMP Analysis

Intersection	Traffic Scenario	AM Peak Hour		PM Peak Hour	
		V/C	LOS	V/C	LOS
Pacific Coast Highway at 7th Street	Existing	0.886	D	0.972	E
	Existing With Project	0.913	E	<b>1.050</b>	<b>F</b>
	Cumulative Year (2035) Without Project	0.968	E	<b>1.068</b>	<b>F</b>
	Cumulative Year (2035) With Project	<b>1.006</b>	<b>F</b>	<b>1.174</b>	<b>F</b>
Pacific Coast Highway at 2nd Street	Existing	0.807	D	0.899	D
	Existing With Project	0.928	E	<b>1.064</b>	<b>F</b>
	Cumulative Year (2035) Without Project	0.879	D	0.978	E
	Cumulative Year (2035) With Project	<b>1.009</b>	<b>F</b>	<b>1.231</b>	<b>F</b>

Source: Fehr & Peers 2017a.

Below acceptable LOS are shown in **bold**.

Notes: V/C = volume-to-capacity; LOS = level of service

**Impact 5.16-4: The proposed Project would not increase hazards due to a design feature.  
[Threshold T-4]**

**Impact Analysis:** At Project completion, improvements to the circulation network within the SEASP area would improve vehicular, pedestrian, and bicycle mobility. As discussed previously, improvements would consist of roadway connections, additional lanes at intersections, and new bicycle lanes and sidewalks (also see PDF-4 and PDF-5, below). The City of Long Beach and Long Beach Fire Department (LBFD) have adopted roadway design standards that preclude the construction of any unsafe design features. Standards for provision of safe road and circulation improvements are also outlined in the Specific Plan. The proposed Project roadway and circulation improvements would be required to adhere to the City’s Standard Engineering Plans and LBFD’s

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

design standards, as well as those outlined in the Specific Plan, which would be imposed on Project developments by the City and LACFD during the building plan check and development review process. Compliance with these established and proposed design standards would ensure that hazards due to design features would not occur. No mitigation measures are necessary.

---

**Impact 5.16-5: The proposed Project would not result in inadequate emergency access. [Threshold T-5]**

---

***Impact Analysis:*** As discussed above, the Project provides for the needs of pedestrian, bicyclists, vehicles, and transit uses. The proposed mobility plan would provide greater connectivity as well as convenient, efficient, and safe access to uses within the proposed Project. The Project is situated in a congested area that experiences vehicle delay at intersections with and without the proposed Project during peak hours. During peak periods emergency vehicles have the ability to use the entire roadway right-of-way, as is done under existing conditions. The Long Beach Fire Department (LBFD) indicated that it is currently meeting its response time goals and expects to do so in the future (see Section 5.14, *Public Services*). Additionally, the Specific Plan's additional connectivity in the area will provide additional route choices for emergency responders, which would assist in improving response times in the area.

To address fire and emergency access needs, the traffic and circulation components of the proposed Project would be designed and constructed in accordance with all applicable LBFD design standards for emergency access (e.g., minimum lane width and turning radius). For example, new site access driveways and drives aisles would be designed to meet the minimum width requirements of LBFD to allow the passing of emergency vehicles. Future development projects under the proposed Project would also be required to incorporate all applicable design and safety requirements in the most current adopted fire codes, building codes, and nationally recognized fire and life safety standards of the City and LBFD, such as those outlined in Chapter 18.48 (Fire Code) of the City's municipal code, which incorporates by reference the 2013 California Fire Code. Compliance with these codes and standards is ensured through the City's and LBFD's development review and building permit process.

Additionally, during the building plan check and development review process, the City would coordinate with LBFD and LBPD to ensure that the necessary fire prevention and emergency response features are incorporated into the proposed Project and that adequate circulation and access (e.g., adequate turning radii for fire trucks) is provided within the traffic and circulation components of the proposed Project. All site and building improvements proposed under the Project would be subject to review and approval by the City, LBFD, and LBPD prior to building permit and certificate of occupancy issuance. Therefore, impacts on emergency access would be less than significant.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

---

**Impact 5.16-6: The proposed Project complies with adopted policies, plans, and programs for alternative transportation. [Threshold T-6]**

---

***Impact Analysis:*** The mobility and streetscape plan for the proposed Specific Plan is guided by the City's mobility element and incorporates several complete street concepts to promote bicycle and pedestrian travel. The Specific Plan would provide an equitable method of vehicular, public transit, pedestrian, and bicycle access for development of the area. Section 3.5.1, *Description of the Project*, of Chapter 3, *Project Description*, discusses the improvements to the Specific Plan area to accommodate transit, pedestrians, bicycles, and autos, which would create an efficient, balanced, multimodal mobility network by integrating autos, transit, bicycles, and pedestrians into a complete street.

*Pedestrian*

The Project would enhance pedestrian facilities throughout the Specific Plan area by providing new sidewalks, enhanced lighting and landscaping, and implementation of bicycle lanes, which would also enhance pedestrian safety. New pedestrian connections are proposed in the Specific Plan area and offsite. Major roadways throughout the Specific Plan area will provide sidewalks on both sides of the road, increasing the performance of the pedestrian facilities. Additionally, certain locations will have a buffered sidewalk, providing enhanced pedestrian comfort and safety. Therefore, the Project would have a beneficial impact to pedestrian facilities.

*Bicycle*

The existing bicycle facilities in the study area are discontinuous. The Project proposes new bicycle facilities throughout the SEASP. A Class IV cycle track along Pacific Coast Highway and Studebaker Road will provide local access to Long Beach, while Class II bicycle facilities along 2nd Street, Shopkeeper Road, and Marina Drive will provide access throughout the Project area. The proposed bicycle facilities will improve overall access throughout the Specific Plan area and eliminate several existing discontinuous facilities.

Because the Project area proposes improvements to the existing bicycle network, there is no conflict with the adopted City of Long Beach Bicycle Master Plan or City of Long Beach Mobility Element. The proposed Class IV bikeways provide a buffered bikeway, which increases the performance and safety of the bicycle facilities. The proposed Class II bikeways provide continuity between the existing bikeways, also increasing the performance of the bicycle facilities. Therefore, the Project would have a beneficial impact to bicycle facilities.

*Transit*

The proposed Specific Plan is currently served by the Orange County Transportation Authority and Long Beach Transit bus services (see Figure 5.16-2, *Transit Routes and Facilities*). The number of



## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

transit trips generated by the Project was estimated by multiplying the peak hour trip generation (2,555 PM peak hour trips) by 1.4 to convert auto trips to person trips (3,577 person trips), and assuming that up to 3.5 percent of those trips could be transit trips. This results in the potential of 125 PM peak hour transit trips generated by the Project. With 13 transit routes serving the study area, this would equate to about 10 riders per route. Also, multiple buses operate on most of the routes during the peak hours, and this would result in an estimated 4 riders per transit vehicle. At an estimated increase of 4 riders per transit vehicle, the performance or safety of transit will not decrease. Impacts to transit are less than significant.

### *Conclusion*

In summary, the proposed Specific Plan would improve bicycle and pedestrian facilities and infrastructure throughout the Project area to promote active and alternative modes of transportation. Additionally, it would not create a substantial increase in transit ridership that could decrease the performance or safety of the system.

### *Consistency with the Mobility Element*

The SEASP is guided by the City's mobility element and is consistent with several policies to promote complete streets and alternative transportation modes:

- **MOP Policy 1-1:** To improve the performance and visual appearance of Long Beach's streets, design streets holistically using "complete streets approach" which considers walking, those with mobility constraints, bicyclists, public transit users, and various modes of mobility in parallel.
- **MOP Policy 1-4:** Allow for flexible use of public right-of-way to accommodate all users of the street system, while maintaining safety standards.
- **MOP Policy 1-9:** Increase mode shift of transit, pedestrians, and bicycles.
- **MOP Policy 2-2:** Design the character and scale of the street to support its street type and place-type designation and overlay networks.
- **MOP Policy 2-6:** Ensure high-quality, on-street access to transit stops and stations.
- **MOP Policy 2-11:** Consider every street in Long Beach as a street that bicyclists and pedestrians will use.
- **MOP Policy 2-18:** Provide adequate sidewalk widths and clear path of travel as determined by street type classification, adjoining land uses, and expected pedestrian usage.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- **MOP Policy 5-2:** Reduce Vehicle Miles Traveled (VMT) and vehicle trips through the use of alternative modes of transportation and TDM [transportation demand management].

Furthermore, the SEASP would help the City implement AB 1358, the California Complete Streets Act. AB 1358, described in Section 5.16.1.1, *Regulatory Setting*, requires local governments to plan for a balanced, multimodal transportation network that meets the needs of all users. By incorporating Complete Streets elements/components into the SEASP, the City would increase the number of trips made by alternative modes of travel, reducing the number of vehicle trips. An increase in transit trips, bicycling, and walking would thus help the City meet the transportation needs of all residents, workers, and visitors while reducing traffic congestion. Therefore, no impacts to adopted policies, plans, and programs for alternative transportation are anticipated to occur.

### *Consistency with SB 743*

As stated in Section 5.16.1.1, *Regulatory Setting*, SB 743 started a process that could fundamentally change transportation impact analysis as part of CEQA compliance. These changes in many parts of California (if not statewide) will include the elimination of auto delay, LOS, and similar measures of vehicular capacity or traffic congestion as a basis for determining significant impacts. As part of the new CEQA Guidelines, the new criteria “shall promote the reduction of greenhouse gas emissions, the development of multimodal transportation networks, and a diversity of land uses” (Public Resources Code Section 21099(b)(1)). Certification of the new guidelines are expected in early 2017. However, since OPR has not yet amended the CEQA Guidelines to implement this change, automobile delay is still considered a significant impact, and the City of Long Beach will continue to use the established LOS criteria.

For informational purposes, Fehr & Peers prepared a technical memorandum (see Appendix J1) to quantify the VMT for the Project under existing and proposed conditions. VMT calculations and reductions were quantified using the SCAG forecasting model and the U.S. Environmental Protection Agency mixed-use development (MXD) trip generation methodology to accurately estimate Project trip internalization based on land use mix and accessibility, assist in identifying appropriate transportation demand management (TDM) approaches for the Project, and quantify VMT reductions associated with those TDM strategies. Detailed methodology used to calculate VMT and VMT reductions are provided in Appendix J1 of this DEIR.

Table 5.16-17 shows the VMT and VMT per service population. As shown, the overall VMT would increase by approximately 305,044 compared to existing conditions, and the VMT per service population would decrease by approximately 5.84 or 13 percent.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

**Table 5.16-17 VMT and VMT per Service Population**

	Existing	Proposed	Net Change
VMT	455,236	760,280	+305,044
VMT per Service Population	45.34	39.50	-5.84

Source: Fehr & Peers 2017b.

Notes: VMT=Vehicle Miles Traveled, Service population represents residential population plus employment in the study area

The proposed Specific Plan includes robust improvements to the pedestrian and bicycle network. Table 5.16-18 shows that these measures would result in a VMT reduction of approximately 56,261, or 7.4 percent. With these improvements, VMT per service population is expected to decrease by approximately 19 percent compared to existing conditions.

**Table 5.16-18 VMT and VMT per Service Population With Active Transportation**

	Proposed	Proposed with TDM measures	VMT Reduction
VMT	760,280	704,019	-56,261
VMT per Service Population	39.50	36.57	-2.93

Source: Fehr & Peers 2017b.

Notes: VMT=Vehicle Miles Traveled

Service population represents residential population plus employment in the study area.

The proposed Specific Plan includes a robust TDM Plan (see Appendix J2 of this DEIR). The TDM Plan includes a number of strategies to reduce peak hour trips by an additional 10 percent. Table 5.16-19 shows that these measures would result in a VMT reduction of approximately 126,663, or 17 percent. With TDM measures, VMT per service population is expected to decrease by approximately 27 percent compared to existing conditions. The current VMT reductions are due to the built environment variables and represent a reduction of 13 percent relative to VMT that would otherwise be generated if no trip internalization would occur. Given the internalization estimate of approximately 13 percent per day reflected in the D variables associated with the initial VMT estimation for existing uses in the area, the Project would achieve a total VMT reduction of approximately 40 percent relative to existing conditions if no D variables were accounted for (e.g. if no trip internalization is accounted for in the VMT estimates). This is consistent with maximum VMT reductions noted for compact infill developments like the SEASP area, where research shows the maximum VMT reductions to be approximately 40 percent.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-19 VMT and VMT per Service Population With TDM Plan

	Proposed	Proposed with TDM measures	VMT Reduction
VMT	760,280	633,617	-126,663
VMT per Service Population	39.50	32.91	-6.59

Source: Fehr & Peers 2017b.

Notes: VMT=Vehicle Miles Traveled

Service population represents residential population plus employment in the study area.

**Impact 5.16-7: The proposed Project would not result in a change in air traffic patterns [Threshold T-3]**

**Impact Analysis:** The Long Beach Municipal Airport is approximately 2.5 miles northwest of the Project area. The Project area is not within the airport’s land use plan and would not cause a change in the directional patterns of aircrafts flying to and from Long Beach Municipal Airport. Portions of the Project area are within the airport planning area of the Los Alamitos Joint Forces Training Base (JFTB). However, as determined in Sections 5.8, *Hazards and Hazardous Materials*, and 5.12, *Noise*, of this DEIR, the Project area is not within safety hazard zones or noise contours of JFTB. In addition, according to Section 5.10, *Land Use and Planning*, future development would not conflict with building height restrictions identified in the airport environs land use plan. Project implementation would not result in a change in air traffic patterns. No impacts are anticipated.

**5.16.4 Cumulative Impacts**

Cumulative traffic impacts are created when the proposed Project—combined with other future development projects accommodated by the City’s General Plan—contributes to the overall traffic impacts, requiring additional improvements to maintain acceptable level of service operations with or without the proposed Project. A significant cumulative impact is identified when a facility is projected to operate below the level of service standards due to cumulative future traffic in combination with Project-related traffic increases. Cumulative traffic impacts were addressed in Impacts 5.16-1, 5.16-2, and 5.16-3. Impacts and mitigation measures are discussed in Sections 5.16.6 and 5.16.7, below. As discussed in these sections, the proposed Project’s incremental effect on congested intersections would be significant at 14 study area intersections. The City of Long Beach requires payment of transportation improvement fees in accordance with Chapter 18.17 (Transportation Improvement Fee) of the City’s municipal code to mitigate local traffic impacts. As detailed in this section, the Project’s contribution to cumulative traffic impacts at intersections in the

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

cities of Long Beach and Seal Beach and impacts at CMP intersections and freeway facilities would be cumulatively considerable and therefore significant.

### 5.16.5 Existing Regulations

#### State and Regional

- The California Complete Streets Act (Assembly Bill 1358)
- SCAG 2013 Regional Transportation Plan/Sustainable Communities Strategy
- Los Angeles County Congestion Management Program

#### Local

- City of Long Beach Municipal Code, Chapters 10.08 (Traffic Control Devices), 10.58 (Pedestrians), 10.48 (Bicycles), 18.17 (Transportation Improvement Fee)

### 5.16.6 Level of Significance Before Mitigation

Upon implementation of regulatory requirements, the following impacts would be less than significant: 5.16-4, 5.16-5, 5.16-6, and 5.16-7.

Without mitigation, the following impacts would be **potentially significant**:

- **Impact 5.16-1** Project-related traffic would result in a substantial impact at 18 intersections during the traffic peak hours. The intersections affected are under the jurisdictions of the cities of Long Beach, Seal Beach and Caltrans.
- **Impact 5.16-2** Project-related traffic would result in a substantial impact at freeway facilities at State Route 22, Interstate 405 and Interstate 605.
- **Impact 5.16-3** Project-related traffic would result in a substantial impact at two CMP intersections.

### 5.16.7 Mitigation Measures

#### Project Design Features

The following Project Design Features (PDF) would reduce impacts associated with the proposed Project:

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

### *Transportation and Motor Vehicles*

PDF-1      **Reduction of Peak Hour Trips, Transportation Management Association (TMA):** The City shall establish a TMA with authority to implement strategies pertaining to trip reduction through transportation demand management (TDM). Responsibilities of the TMA shall include, but are not limited to:

- Operation of all shared parking subject to the TMA program.
- Real-time information and other wayfinding mechanisms.
- Coordinating and offering programs to provide biking, walking, and other trip reduction strategies.
- Data collection.

The TMA shall actively engage existing and future parking lot and garage owners to lease, sell, or make spaces publically accessible in order to be added to the district's pool of shared parking.

PDF-2      **Reduction of Peak Hour Trips, Transportation Demand Management (TDM) Plan:** Projects within SEASP that generate 50 or more peak hour trips are required to:

- Join the TMA and ensure that tenants are TMA members for the first 25 years from the date of final inspection or certificate of occupancy.
- Submit a Transportation Demand Management (TDM) plan to the City Traffic Engineer and Director of Development Services, or his/her designee.

PDF-3      **Reduced Parking Requirements:** Projects in SEASP are eligible for a parking reduction by incorporating Transportation Demand Management (TDM) strategies, pending Site Plan Review approval. TDM strategies applicable to reduced parking requirements, subject to the discretion of the City's Site Plan Review Committee, include but are not limited to:

- Car sharing
- Carpool/vanpool
- Unbundled parking (parking spaces are rented or sold separately, rather than automatically included with the rent or purchase price of a residential or commercial unit)

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Joint use (shared parking)
- Transit, bicycle, and pedestrian system improvements
- Trip reduction incentives to employees, such as free transit passes

A “park once” policy shall be promoted for SEASP. Rather than driving from one use to another, visitors are highly encouraged to park once and walk to one or more destinations within the Project area. Similarly, residents and employees are encouraged to walk from residences or workplaces to SEASP destinations.

All parking reduction requirements shall be approved at the discretion of the Site Plan Review Committee, which will determine the appropriate level of parking demand reduction generated by these strategies on a project-specific basis.

PDF-4      **Internal Circulation:** In order to create a more walkable community and add vehicular connections throughout the Project area, the SEASP creates a block or grid patterns. Conceptual internal street sections are shown on Figure 6-16 of the Specific Plan.

PDF-5      **Pedestrian Network:** Many streets in the SEASP area currently do not have sidewalks or only have sidewalks on one side of the street. Figure 6-1 in the Specific Plan shows the network of proposed sidewalk connections. Pedestrian connections shall be developed in coordination and pursuant to the standard of Chapter 7, Design Standards and Guidelines, of the Specific Plan. The addition of sidewalks and/or boardwalk are proposed along Pacific Coast Highway, Channel Drive, Studebaker Road, 2nd Street, Marina Drive, and streets internal to development that will occur in the Specific Plan area. In addition to providing more sidewalks, the Specific Plan recommends “breaking-up” the long block lengths in the SEASP area into shorter blocks to provide more connectivity and make it easier for pedestrians to comfortably navigate an area. Midblock crossings are proposed across Pacific Coast Highway adjacent to areas designated as Community Core. Lastly, to limit exposure and increase safety for pedestrians crossing the street, curb extensions are also envisioned at crossings, possibly along Marina Drive or Studebaker Road as a transition into the mixed-use areas.

PDF-6      **Bicycle Network:** Figure 6-2 in the Specific Plan identifies proposed bicycle connections. Bicycle circulation is provided on streets with designated bike lanes, separated bikeways (cycle tracks), and off-street pathways. These facilities are classified in four bicycle facility classifications:

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- *Class I Bikeway (Multiuse Path)*. Provides a separated corridor that is not served by streets and highways and is away from the influence of parallel streets. Class I bikeways are for nonvehicle use only with opportunities for direct access and recreational benefits, right-of-way for the exclusive use of bicycles and pedestrians, and minimized cross-flow conflicts. SEASP includes a new Class I facility on the north side of the Los Cerritos Channel that would connect Pacific Coast Highway to Loynes Drive if it does not impact sensitive wetlands in the area. A connection is also proposed that would link this route to the existing San Gabriel Bike Trail.
- *Class II Bikeway (Bike Lanes)*. Provides a delineated right-of-way assigned to bicyclists to enable more predictable movements, accommodating bicyclists through on-street corridors. New Class II bikeways are proposed along the Shopkeeper Road extension to Pacific Coast Highway, Studebaker Road, and Marina Drive.
- *Class III Bikeway (Bike Route)*. A shared facility (by bikes and vehicles) that provides either continuity with other bicycle facilities or designates preferred routes through high-demand on-street corridors. The existing Class III facility along 2nd Street between Pacific Coast Highway and Studebaker Road is envisioned to be improved as a Class II facility through implementation of this Specific Plan.
- *Class IV Separated Bikeways (Cycle Track)*. Provides delineated right-of-way assigned to bicyclists with physical separation from vehicles. This separation can include parked vehicles, bollards, curbs, or any other physical device that provides separation. The most significant change to the bike and roadway network proposed for the SEASP area is the inclusion of two cycle tracks—one along Pacific Coast Highway and the other along Studebaker Road.

PDF-7

**Traffic Light Synchronization:** Traffic signal timing at intersections along the Pacific Coast Highway are controlled by Caltrans and the City of Long Beach. To better coordinate progression of traffic signals in the area, the SEASP identifies the following options:

- Enter into a cooperative agreement with Caltrans to maintain the signals.
- Have Caltrans relinquish sections of their facility to the City, so that the City can update the equipment and maintain the signals.



5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- Work with Caltrans on a comprehensive signal timing program that is implemented to coordinate and maintain the timings, including hardware to ensure that the signal clocks do not drift from one another.

*Transportation Demand Management Plan*

In accordance with PDF-1 through PDF-3 above, a TDM Plan was prepared (see Appendix J2 of this DEIR), which requires that all projects that will generate more than 50 peak hour trips to join the TMA and implement TDM measures to achieve the Project's goal of reducing peak hour trip generation by 10 percent. The TDM Plan provides a menu of strategies based on user or development type and its associated trip reduction percentage. The Plan also provides a monitoring framework through the collection of a number of data sources to ensure that the Project's goals are met. Monitoring will be based on employee and resident surveys, traffic counts and trip generation studies, transit boardings/alightings at transit stops, bike share ridership, and data from in-vehicle navigation systems and cellular phones.

**Mitigation Measures**

**Impact 5.16-1**

TRAF-1 Prior to the issuance of the first building permit pursuant to the proposed Project, the City of Long Beach shall update the City's traffic mitigation fee program to include the improvements outlined in Mitigation Measure TRAF-3. The City shall prepare a "nexus" study that will serve as the basis for requiring development impact fees under AB 1600 legislation, as codified by California Code Government Section 66000 et seq., to support changes under consideration for the SEASP. The established procedures under AB 1600 require that a "reasonable relationship" or nexus exist between the traffic improvements and facilities required to mitigate the traffic impacts of new development pursuant to the proposed Project. Traffic improvements and facilities necessary to mitigate the Project impacts shall be included, among other improvements, in the AB 1600 nexus study. The City's fee program shall be updated based on the nexus study. Fees are assessed when there is new construction, an increase in square footage in an existing building, or the conversion of existing square footage to a more intensive use. The development fees collected are applied toward circulation improvements and right-of-way acquisition. Fees are calculated by multiplying the proposed square footage, dwelling unit, or hotel room by the appropriate rate. Traffic mitigation fees are included with any other applicable fees payable at the time the building permit is issued. The City will use the traffic mitigation fees to fund construction (or to recoup fees advanced to fund construction) of the transportation improvements identified in Mitigation Measure TRAF-3.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

TRAF-2 As part of the subsequent environmental review for development projects that would be accommodated by the SEASP, a site-specific traffic study shall be prepared by the project applicant/developer to evaluate the project's potential traffic and transportation impacts consistent with the City of Long Beach Guidelines for Signalized Intersections and the Los Angeles County CMP Guidelines to identify specific improvements, as deemed necessary, to provide safe and efficient onsite circulation and access. The traffic study for the first development project to be considered under the SEASP shall include an analysis of signal timing of 2nd Street through Naples to identify timing adjustments needed to improve signal synchronization. The traffic study shall be approved by the Public Works Department. Payment of fees, construction of improvements, and signal timing shall be implemented prior to issuance of a building permit.

TRAF-3 Prior to issuance of building permits for development projects that would be accommodated by the SEASP, project applicants/developers shall make fair-share payments to the City of Long Beach toward construction of the traffic improvements listed below. The following traffic improvements and facilities are necessary to mitigate impacts of the SEASP and shall be included in the City's fee mechanism(s):

### **Existing With Project Improvements**

- **3. Studebaker Road & SR-22 Westbound Ramps:** Construct a spiral striped roundabout with two circulating lanes, with a southbound slip (bypass) lane. The southbound approach would be striped with two through lanes and one shared through-left turn lane; the westbound approach would have two left turn lanes and one right turn slip lane; and the northbound approach would have two through lanes and one right turn slip lane. This measure would be funded through the City of Long Beach Capital Improvement Plan (CIP) and fair-share contributions from area developments.

Alternatively, the intersection could remain signalized with the following improvements:

- Modify the westbound approach from two left turn lanes and one right turn lane, to three left turn lanes and one right turn lane.
- Modify the southbound approach from one left turn lane and one through lane, to one left turn lane and three through lanes.
- Optimize the AM and PM signal cycle lengths and splits.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- **17. Shopkeeper Road & 2nd Street:** This intersection would require the following improvements:
  - Modify the northbound approach from one shared through-left turn lane and one right turn lane, to one shared through-left turn lane and two right turn lanes.
  - Modify the westbound approach from one left turn lane, two through lanes, and one shared through-right turn lane, to two left turn lanes, two through lanes, and one shared through-right turn lane.
- **27. 2nd Street & Bay Shore Ave Avenue:** This intersection would require the following improvements:
  - Reconfigure the northbound approach to provide a dedicated left-turn lane, and a shared through/right-turn lane.
  - Add a southbound right-turn lane.
  - Add an eastbound right-turn lane and restripe the shared through/right-turn lane as a through lane.

**Cumulative Year (2035) With Project Improvements**

- **3. and 11. Studebaker Road & SR-22 West- and Eastbound Ramps:** Construct a spiral striped roundabout with two circulating lanes, with a southbound slip (bypass) lane. The southbound approach would be striped with two through lanes and one shared through-left turn lane; the westbound approach would have two left turn lanes and one right turn slip lane; and the northbound approach would have two through lanes and one right turn slip lane. This measure would be funded through the City of Long Beach Capital Improvement Plan (CIP).

Alternatively, the intersection could remain signalized and with the following improvements:

- Modify the westbound approach from two left turn lanes and one right turn lane, to three left turn lanes and one right turn lane.
- Modify the northbound approach from one through lane and one shared through-right turn lane, to two through lanes and one shared through-right turn lane.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- Modify the southbound approach from one left turn lane and one through lane, to one left turn lane and three through lanes.
- Optimize the AM and PM signal cycle lengths and splits.
- **15. Marina Drive & 2nd Street:** This intersection would require the following improvements:
  - Modify the northbound approach from one left turn lane, one shared through-left turn lane, one through lane, and one right turn lane, to two left turn lanes, one through lane, and one right turn lane.
  - Modify the southbound approach from one left turn lane, one shared through-left turn lane, and one right turn lane, to two left turn lanes, one through lane, and one right turn lane.
  - Modify the westbound approach from one left turn lane, two through lanes, and one shared through-right turn lane, to two left turn lanes, two through lanes, and one shared through-right turn lane.
- **17. Shopkeeper Road & 2nd Street:** This intersection would require the following improvements:
  - Modify the westbound approach from one left turn lane, two through lanes, and one shared through-right turn lane, to two left turn lanes, two through lanes, and one shared through-right turn lane.
  - Modify the eastbound approach from one left turn lane, two through lanes, and one shared through-right turn lane, to one left turn lane, three through lanes, and one right turn lane.
- **20. PCH & Studebaker Road:** This intersection would require the following improvements:
  - Modify the southbound approach from one left turn lane, two through lanes, one right turn lane, and one right turn lane, to one left turn lane, three through lanes, one right turn lane.
  - Optimization of the PM signal cycle lengths and splits.

TRAF-4 Prior to issuance of building permits for development projects that would be accommodated by the SEASP, project applicants/developers shall make fair-share payments to the City of Seal Beach toward construction of the traffic improvement listed below. Fair-share payments shall occur through either: 1) an agreement between the developer and City of Seal Beach to pay fair share funding for the

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

improvement or 2) payment to the City of Seal Beach traffic mitigation fee program that is based on nexus requirements contained in the Mitigation Fee Act (Govt. Code § 66000 et seq.) and 14 Cal. Code of Regs. § 15126.4(a)(4). The traffic mitigation fee program must include the intersection improvements identified below. If the City's traffic fee program has not incorporated the intersections identified below at the time of building permits and the applicant has made reasonable efforts to contribute its fair share, then project applicants shall have no further obligation to comply with this mitigation measure.

- **19. Seal Beach Boulevard & 2nd Street/Westminster Boulevard:** Modify the northbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one right turn lane.
- **22. PCH & Seal Beach Boulevard:** This intersection would require the following improvements:
  - Provide three through lanes on the northbound approach.

TRAF-5

Prior to issuance of grading permits for development projects that would be accommodated by the SEASP, project applicants/developers shall prepare a construction management plan. The construction management plan shall be approved by the City of Long Beach Public Works Department. The construction management plan shall identify construction hours, truck routes, travel patterns for haul routes, staging and parking areas, staggered worker arrival times, and safety procedures for pedestrians and cyclists. The construction management plan shall prohibit the use of heavy construction vehicles during peak hours. The plan shall also require the construction contractor to implement the following measures during construction activities, which shall be discussed at the pre-grading conference/meeting:

- Minimize obstruction of through-traffic lanes and provide temporary traffic controls, such as a flag person, during all roadway improvement activities to maintain adequate access for emergency vehicles and personnel.
- Develop a traffic plan to minimize interference for emergency vehicles and personnel from demolition and construction activities (e.g., advanced public notice of demolition and construction activities)

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

### *Mitigation Measures Considered and Rejected*

Mitigation measures were evaluated for every impacted intersection in detail (see Section 12 of the TIA in Appendix J1 of this DEIR). However, some mitigation measures were determined to be infeasible for the reasons in Section 5.16-8, *Level of Significance After Mitigation*, below. A summary of all intersection impacts and mitigation measures considered is provided in Table 5.16-20.

The traditional method of mitigating significant traffic-related impacts—when defined as delays to autos due to overcapacity or increases in auto trips on street segments—is to increase auto capacity by providing additional lanes or facilities. Widening roads is challenging because space in the Project area is already constrained and utilized by other land uses, wetlands, or transportation facilities. Due to the limited right-of-way in the Project area and surrounding areas of Long Beach, capacity improvements for autos may require the loss or constriction of bicycle lanes, sidewalks, parking lots, etc. The traffic analysis for this project could not identify any additional capacity improvements for autos that would not impact existing buildings or have negative secondary impacts—such as eliminating wetland areas or parking or degrading the pedestrian environment. However, implementation of the proposed Specific Plan would improve mobility in the area through pedestrian and bicycle improvements and other TDM measures (see also Appendix J2 of this DEIR).

Impacts for which mitigation measures were evaluated but improvements were deemed infeasible due to right-of-way constraints, encroaching on wetlands, degradation of pedestrian facilities or are under the jurisdiction of another agency are provided in Table 5.16-20. This table provides a summary of the mitigation measures needed and the reason that the mitigation measures are deemed infeasible. Section 5.16-8 provides the levels of significance after incorporation of all feasible mitigation measures.

### **Impact 5.16-2**

TRAF-6 Prior to issuance of the first the occupancy permits for development projects that would be accommodated by the SEASP, the City and Caltrans shall jointly identify feasible operational and physical improvements and the associated fair-share funding contribution necessary to mitigate Project-related impacts to state transportation facilities. In the event that Caltrans prepares a valid study, as defined below, that identifies fair share contribution funding sources attributable to and paid from private and public development to supplement other regional and State funding sources necessary undertake improvements to the I-22, I-605, and I-405, in the Project study area, then the project applicant shall use reasonable efforts to pay the applicable fair share amount to Caltrans.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

The study shall be reviewed and approved by the California Transportation Commission. It shall include fair share contributions related to private and or public development based on nexus requirements contained in the Mitigation Fee Act (Govt. Code § 66000 et seq.) and 14 Cal. Code of Regs. § 15126.4(a)(4) and, to this end, the study shall recognize that impacts to Caltrans I-22, I-605, and I-405 facilities that are not attributable to development located within the City of Long Beach are not required to pay in excess of such developments' fair share obligations. The fee study shall also be compliant with Government Code § 66001(g) and any other applicable provisions of law. The study shall set forth a timeline and other relevant criteria for implementation of the recommendations contained within the study to the extent the other agencies agree to participate in the fee study program.

In the event the study has been prepared, project applicants shall use reasonable efforts to pay the fair share amount to Caltrans. If Caltrans chooses to accept the project applicant's fair share payment, Caltrans shall apply the payment to the fee program adopted by Caltrans or agreed upon by the City and Caltrans as a result of the fair share fee study. Caltrans shall only accept the fair share payment if the fair share fee study has been completed. If, within five years from the date that the first building permit is issued for the Project, Caltrans has not completed the fair share fee study, then project applicants shall have no further obligation to comply with this mitigation measure.

*Mitigation Measures Considered and Rejected*

The proposed Project would result in project level and cumulative impacts to the following freeway facilities: northbound and southbound I-405, northbound and southbound I-605, westbound and eastbound SR-22, and the SR-22 Studebaker off-ramp and on-ramp (merge and diverge analysis).

Impacts to freeway segments would require addition of a main-line travel lane on the freeways. There is insufficient space to implement this mitigation within the existing right-of-way. Furthermore, there is no funding mechanism in place to contribute fees to this improvement. Therefore, impacts to freeway facilities are *significant and unavoidable*.

**Impact 5.16-3**

Mitigation measures were considered and rejected to improve the CMP intersections of PCH at 7th Street and at 2nd Street to an acceptable LOS (see Section 8 of the TIA in Appendix J1 of this DEIR). Although these improvements would mitigate the impact to an acceptable LOS E during the AM and PM peak hours, development exists on all four quadrants of the intersections, and sufficient right-of-way does not exist. Since these intersections exceed the minimum standard of LOS E and no feasible mitigation is available, the Los Angeles CMP requires a deficiency plan. This

5. Environmental Analysis  
**TRANSPORTATION AND TRAFFIC**

plan includes improvement measures to implement at the intersection or TDM techniques that would decrease reliance on single-occupant vehicles. TDM measures are required, as detailed in PDF-1 through 3, above. Refer also to Appendix J2 of this DEIR.



Table 5.16-20 Project Intersection Mitigation Feasibility Summary

Intersection	Existing Plus Project Mitigation	Cumulative Year Mitigation	Feasibility of Mitigation			Significant Unavoidable Adverse Impact?
			Improvement encroaches onto physical development	Improvement encroaches onto wetlands	Improvement is under the Jurisdiction of Another Agency	
3. Studebaker Rd & SR-22 Westbound Ramps	<p>A spiral striped roundabout with two circulating lanes and a southbound slip lane would provide acceptable operations. The southbound approach requires two through lanes and one shared through-left turn lane, the westbound approach requires two left turn lanes and one right turn slip lane, and the northbound approach requires two through lanes and one right turn slip lane. Funding for this mitigation measure is provided through the City of Long Beach CIP.</p> <p>Or</p> <ul style="list-style-type: none"> <li>Modify the westbound approach from having two left turn lanes and one right turn lane, to having three left turn lanes and one right turn lane.</li> <li>Modify the southbound approach from having one left turn lane and two through lanes, to having one left turn lane and three through lanes.</li> <li>Optimize the AM and PM signal cycle lengths and splits</li> </ul>	<p>A spiral striped roundabout with two circulating lanes and a southbound slip lane would provide acceptable operations. The southbound approach requires two through lanes and one shared through-left turn lane, the westbound approach requires two left turn lanes and one right turn slip lane, and the northbound approach requires two through lanes and one right turn slip lane. Funding for this mitigation measure is provided through the City of Long Beach CIP.</p> <p>Or</p> <ul style="list-style-type: none"> <li>Modify the westbound approach from having two left turn lanes and one right turn lane, to having three left turn lanes and one right turn lane.</li> <li>Modify the northbound approach from having one through lane and one shared through-right turn lane, to having two through lanes and one shared through-right turn lane.</li> <li>Modify the southbound approach from having one left turn lane and one through lane, to having one left turn lane and three through lanes.</li> <li>Optimize the AM and PM signal cycle lengths and splits</li> </ul>	No	No	Yes, Caltrans	Yes, temporarily until Caltrans approval
4. Ximeno Ave & 7th St	<ul style="list-style-type: none"> <li>Modify the eastbound approach from having one left turn lane, one through lane, one shared through-right turn lane, to having one left turn, two through lanes, and one shared through-right turn lane. This requires an additional receiving lane.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the eastbound approach from having one left turn lane, one through lane, one shared through-right turn lane, to having one left turn, two through lanes, and one shared through-right turn lane. This requires an additional receiving lane.</li> <li>Modify the westbound approach from having one left turn, one through lane, and one shared through-right turn lane, to having one left turn lane, two through lanes, and one shared through-right turn lane. This requires an additional receiving lane.</li> </ul>	Yes	No	No	Yes

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-20 Project Intersection Mitigation Feasibility Summary

Intersection	Existing Plus Project Mitigation	Cumulative Year Mitigation	Feasibility of Mitigation			Significant Unavoidable Adverse Impact?
			Improvement encroaches onto physical development	Improvement encroaches onto wetlands	Improvement is under the Jurisdiction of Another Agency	
5. Pacific Coast Hwy & 7th St	<ul style="list-style-type: none"> <li>Modify the westbound approach from having two through lanes and one right turn lane, to having three through lanes and one right turn lane. This would require an additional receiving lane.</li> <li>Modify the eastbound approach from having two through lanes and one shared through-right turn lane, to having three through lanes and one right turn lane.</li> <li>Modify the northbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one shared through-right turn lane. This would require an additional receiving lane.</li> <li>Modify the southbound approach from having two left turn lanes, two through lanes and one shared through-right turn lane, to having two left turn lanes, three through lanes and one right turn lane.</li> <li>Optimize the AM and PM signal cycle lengths and splits</li> </ul>	<ul style="list-style-type: none"> <li>Modify the westbound approach from having two through lanes and one right turn lane, to having four through lanes and one right turn lane. This requires two additional receiving lanes.</li> <li>Modify the eastbound approach from having two through lanes and one shared through-right turn lane, to having four through lanes and one right turn lane. This requires an additional receiving lane.</li> <li>Modify the northbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one shared through-right turn lane. This requires an additional receiving lane.</li> <li>Modify the southbound approach from having two left turn lanes, two through lanes and one shared through-right turn lane, to having two left turn lanes, three through lanes and one right turn lane. This requires an additional receiving lane.</li> <li>Optimize the AM and PM signal cycle lengths and splits.</li> </ul>	Yes	No	Yes, Caltrans	Yes
6. Bellflower Blvd & 7th St	<ul style="list-style-type: none"> <li>•Modify the westbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one shared through-right turn lane. This would require an additional receiving lane.</li> <li>Modify the eastbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes and one shared through-right turn lane.</li> <li>•Modify the northbound approach from having three through lanes and one right turn lane, to having four through lanes and one right turn lane.</li> <li>Modify the southbound approach from having two left turn lanes, one through lane, and one right turn lane, to having two left turn lanes, two through lanes, and one right turn lane.</li> <li>Optimize the AM and PM signal cycle lengths and splits.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one shared through-right turn lane. This would require an additional receiving lane.</li> <li>Modify the eastbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes and one shared through-right turn lane.</li> <li>Modify the northbound approach from having three through lanes and one right turn lane, to having four through lanes and one right turn lane.</li> <li>Modify the southbound approach from having two left turn lanes, one through lane, and one right turn lane, to having two left turn lanes, three through lanes, and one right turn lane.</li> <li>Optimize the AM and PM signal cycle lengths and splits.</li> </ul>	Yes	No	Yes, Caltrans	Yes

Table 5.16-20 Project Intersection Mitigation Feasibility Summary

Intersection	Existing Plus Project Mitigation	Cumulative Year Mitigation	Feasibility of Mitigation			Significant Unavoidable Adverse Impact?
			Improvement encroaches onto physical development	Improvement encroaches onto wetlands	Improvement is under the Jurisdiction of Another Agency	
7. Channel Dr & 7th St	<ul style="list-style-type: none"> <li>Modify the eastbound approach from having one left turn lane, three through lanes, and one right turn lane, to having one left turn lane, four through lanes, and one right turn lane. This would require an additional receiving lane.</li> <li>Optimize the PM signal cycle lengths and splits.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the eastbound approach from having one left turn lane, three through lanes, and one right turn lane, to having one left turn lane, four through lanes, and one shared through-right turn lane. This would require two additional receiving lanes.</li> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one shared through-right turn lane. This would require an additional receiving lane.</li> <li>Optimize the PM signal cycle lengths and splits.</li> </ul>	Yes	No	Yes, Caltrans	Yes
8. Campus Dr & 7th St	No Impact; mitigation measures are not required.	<ul style="list-style-type: none"> <li>Modify the westbound approach from having two through lanes and a shared through-right turn lane, to having three through lanes and a shared through-right turn lane. This would require an additional receiving lane.</li> <li>Optimize the AM signal cycle lengths and splits.</li> </ul>	Yes	No	Yes, Caltrans	Yes
11. Studebaker Rd & Eastbound Ramps	No Impact; mitigation measures are not required.	<p>A spiral striped roundabout with two circulating lanes and a southbound slip lane, would provide acceptable operations . The southbound approach requires two through lanes and one shared through-left turn lane, the westbound approach requires one left turn lane and one right turn slip lane, and the northbound approach requires two through lanes and two right turn slip lanes. Funding for this mitigation measure is provided through the City of Long Beach CIP</p> <p>Or</p> <ul style="list-style-type: none"> <li>Optimize the AM and PM signal cycle lengths and splits.</li> </ul>	No	No	Yes, Caltrans	Yes, temporarily until Caltrans approval

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-20 Project Intersection Mitigation Feasibility Summary

Intersection	Existing Plus Project Mitigation	Cumulative Year Mitigation	Feasibility of Mitigation			Significant Unavoidable Adverse Impact?
			Improvement encroaches onto physical development	Improvement encroaches onto wetlands	Improvement is under the Jurisdiction of Another Agency	
12. Pacific Coast Hwy & Loynes Dr	<ul style="list-style-type: none"> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one right turn lane, to having two left turn lanes, two through lanes, and one right turn lane.</li> <li>Optimize the PM signal cycle lengths and splits.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one right turn lane, to having two left turn lanes, two through lanes, and one right turn lane.</li> <li>Modify the northbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, two through lanes, and one right turn lane.</li> <li>Modify the eastbound approach from having one left turn lane, one through lane, and one shared through-right turn lane, to having one left turn lane, two through lanes, and one right turn lane.</li> <li>Optimize the PM signal cycle lengths and splits.</li> </ul>	Yes	Yes	Yes, Caltrans and California Coastal Commission	Yes
13. Studebaker Rd & Loynes Dr	No Impact; mitigation measures are not required.	<ul style="list-style-type: none"> <li>Modify the northbound approach from having one left turn and two through lanes, to having one left turn lane and three through lanes. This would require an additional receiving lane.</li> <li>Modify the southbound approach from having two through lanes and one right turn lane, to having three through lanes and one right turn lane. This would require an additional receiving lane.</li> </ul>	No	Yes	Yes, California Coastal Commission	Yes
15. Marina Dr & 2nd St	No Impact; mitigation measures are not required.	<ul style="list-style-type: none"> <li>Modify the northbound approach from having one left turn lane, one shared through-left turn lane, one through lane, and one right turn lane, to having two left turn lanes, one through lane, and one right turn lane.</li> <li>Modify the southbound approach from having one left turn lane, one shared through-left turn lane, and one right turn lane, to having two left turn lanes, one through lane, and one right turn lane.</li> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having two left turn lanes, two through lanes, and one shared through-right turn lane.</li> </ul>	No	No	No	No, less than significant with mitigation incorporated

Table 5.16-20 Project Intersection Mitigation Feasibility Summary

Intersection	Existing Plus Project Mitigation	Cumulative Year Mitigation	Feasibility of Mitigation			Significant Unavoidable Adverse Impact?
			Improvement encroaches onto physical development	Improvement encroaches onto wetlands	Improvement is under the Jurisdiction of Another Agency	
16. Pacific Coast Hwy & 2nd St	<ul style="list-style-type: none"> <li>Modify the northbound approach from having two left turn lanes, two through lanes, and one shared through-right turn lane, to having three left turn lanes, four through lanes, and two right turn lanes with a right turn overlap phase. This would require an additional receiving lane.</li> <li>Modify the southbound approach from having two left turn lanes, three through lanes, and one right turn lane, to having two left turn lanes, four through lanes, and two right turn lanes with a right turn overlap phase. This would require an additional receiving lane.</li> <li>Modify the eastbound approach from having two left turn lanes, two through lanes, one shared through-right turn lane, and one right turn lane, to having two left turn lanes, four through lanes, and one right turn lane with a right turn overlap phase. This would require an additional receiving lane.</li> <li>Modify the westbound approach from having two left turn lanes, three through lanes, and one right turn lane, to having three left turn lanes, four through lanes, and two right turn lanes with a right turn overlap phase. This would require an additional receiving lane.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the northbound approach from having two left turn lanes, two through lanes, and one shared through-right turn lane, to having two left turn lane, four through lanes, and two right turn lanes with a right turn overlap phase. This would require an additional receiving lane.</li> <li>Modify the southbound approach from having two left turn lanes, three through lanes, and one right turn lane, to having two left turn lanes, four through lanes, and two right turn lanes with a right turn overlap phase. This would require an additional receiving lane.</li> <li>Modify the eastbound approach from having two left turn lanes, two through lanes, one shared through-right turn lane, and one right turn lane, to having two left turn lanes, five through lanes, and one right turn lane with a right turn overlap phase. This would require two additional receiving lanes.</li> <li>Modify the westbound approach from having two left turn lanes, three through lanes, and one right turn lane, to having two left turn lanes, four through lanes, and one right turn lane with a right turn overlap phase. This would require an additional receiving lane.</li> </ul>	Yes	No	Yes, Caltrans	Yes
17. Shopkeeper Rd & 2nd St	<ul style="list-style-type: none"> <li>Modify the northbound approach from having one shared through-left turn lane and one right turn lane, to having one shared through-left turn lane and two right turn lanes.</li> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having two left turn lanes, two through lanes, and one shared through-right lane.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the westbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having two left turn lanes, two through lanes, and one shared through-right turn lane.</li> <li>Modify the eastbound approach would have to be modified from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one right turn lane.</li> </ul>	No	Potentially	Yes, California Coastal Commission	Yes
18. Studebaker Rd & 2nd St	No Impact; mitigation measures are not required.	<ul style="list-style-type: none"> <li>Modify the southbound approach from having two left turn lanes and two right turn lanes, to having two left turn lanes and three right turn lanes.</li> <li>Modify the eastbound approach from having two left turn lanes and two through lanes, to having three left turn lanes and two through lanes.</li> </ul>	No	Yes	Yes, California Coastal Commission	Yes

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

Table 5.16-20 Project Intersection Mitigation Feasibility Summary

Intersection	Existing Plus Project Mitigation	Cumulative Year Mitigation	Feasibility of Mitigation			Significant Unavoidable Adverse Impact?
			Improvement encroaches onto physical development	Improvement encroaches onto wetlands	Improvement is under the Jurisdiction of Another Agency	
19. Seal Beach Blvd & 2nd St/Westminster Blvd	<ul style="list-style-type: none"> <li>Modify the northbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one right turn lane.</li> </ul>	<ul style="list-style-type: none"> <li>Modify the northbound approach from having one left turn lane, two through lanes, and one shared through-right turn lane, to having one left turn lane, three through lanes, and one right turn lane.</li> <li>Modify the westbound approach from having two left turn lanes, one through lane, and one shared through-right turn lane, to having two left turn lanes, two through lanes, and one right turn lane.</li> </ul>	No	Potentially	Yes, City of Seal Beach	Yes
20. Pacific Coast Hwy & Studebaker Rd	No Impact; mitigation measures are not required.	<ul style="list-style-type: none"> <li>Modify the southbound approach from having one left turn lane, two through lanes, one right turn lane, and one right turn lane, to having one left turn lane, three through lanes, one right turn lane.</li> <li>Optimization of the PM signal cycle lengths and splits.</li> </ul>	No	No	Yes, Caltrans	Yes, temporarily until Caltrans approval
22. Pacific Coast Hwy & Seal Beach Blvd	No Impact; mitigation measures are not required.	<ul style="list-style-type: none"> <li>Provide three through lanes on the northbound approach.</li> </ul>	No	No	Yes, City of Seal Beach	Yes, temporarily until City of Seal Beach approval
26. 7th St & Park Ave	<ul style="list-style-type: none"> <li>The addition of a through lane on the eastbound approach along 7th Street.</li> </ul>	<ul style="list-style-type: none"> <li>The addition of a through lane on the eastbound and westbound approach along 7th Street.</li> <li>An additional through lane on the northbound approach.</li> <li>An additional shared through-right lane on the southbound approach.</li> </ul>	Yes	No	No	Yes
27. 2nd St. & Bay Shore Ave	<ul style="list-style-type: none"> <li>Reconfigure the northbound approach to provide a dedicated left-turn lane, and a shared through/right-turn lane.</li> <li>Add a southbound right-turn lane.</li> <li>Add an eastbound right-turn lane and restripe the shared through/right-turn lane as a through lane.</li> </ul>	<ul style="list-style-type: none"> <li>Reconfigure the northbound approach to provide a dedicated left-turn lane, a shared through-right lane and a dedicated right-turn lane.</li> <li>Reconfigure the southbound approach to provide a dedicated left-turn lane and shared through-right lane.</li> <li>Reconfigure the eastbound approach to provide a dedicated left-turn lane, two through lanes, and a dedicated right-turn lane.</li> </ul>	Yes, under cumulative improvement only	No	No	Yes, under cumulative condition only

Source: Fehr & Peers 2017a.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

### 5.16.8 Level of Significance After Mitigation

Figure 5.16-5, *Feasibility of Intersection Improvements*, shows an aerial of all of the impacted intersections determined to be significant and unavoidable. The figure provides a context for the feasibility finding of each of the intersection improvements which may be impacted by right of way constraints.

#### Impact 5.16.1

##### *Existing With Project Conditions*

- **3. Studebaker Road & SR-22 Westbound Ramps (Caltrans):** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS C during the AM and PM peak hours. However, both improvements are within the responsibility and jurisdiction of another public agency (Caltrans) and not the lead agency (City of Long Beach). The City cannot assure the construction of improvements to freeway ramps that may be needed to improve traffic flow. Although TRAF-3 requires the project applicant to make fair share fee contributions to the City to fund improvements to the freeway ramps in the Project study area there is no assurance that planned improvements will be in place prior to the time that the Project begins to contribute traffic to the facilities. Accordingly, the Project's contribution of traffic to previously identified, congested ramps under Existing plus Project condition would represent a significant and unavoidable cumulative impact. Mitigation Measure TRAF-3 has been adopted and will reduce this impact, but not to a less-than-significant level. Therefore, the impact is considered *significant and unavoidable*.
- **4. Ximeno Avenue & 7th Street:** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the AM and PM peak hours. The improvements would require right-of-way dedication along 7th Street to accommodate the additional lanes. However, there is insufficient right-of-way due to current development and sidewalks. Since there is insufficient right-of-way to implement these improvements, the mitigation measure is infeasible and the impact is considered *significant and unavoidable*.
- **5. Pacific Coast Highway & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to LOS D during the AM and PM peak hours. These improvements would require right-of-way dedication along 7th Street and Pacific Coast Highway to accommodate the additional lanes. However, there is insufficient right-of-way due to current development. Additionally, the improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.<sup>2</sup>

- **6. Bellflower Boulevard & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS C during the AM and PM peak hour. These improvements are not feasible because it would require right-of-way dedication that would encroach onto existing buildings and eliminate sidewalks to accommodate the additional lanes. Additionally, the improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this intersection. As such, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **7. Channel Drive & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS C during the PM peak hour. These improvements are infeasible because they would require right-of-way dedication that would eliminate sidewalks, and bus stops along 7th Street to accommodate the additional lanes. Additionally, the improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this intersection. Therefore the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **12. Pacific Coast Highway & Loynes Drive (Caltrans):** With mitigation measures detailed in Section 12 of the TIA (Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the PM peak hour. There is sufficient right-of-way, since the existing right-of-way contains sidewalks and grass buffers. However, the roadway improvements fall under the jurisdiction of other public agencies. First, the improvement would encroach upon the adjacent wetlands in the coastal zone, which would require California Coastal Commission approval. Additionally, the improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this intersection. Given these constraints (limited right-of-way, potential wetland constraints, and the inability to guarantee implementation of the improvements), the mitigation is infeasible and the impact is considered *significant and unavoidable*.

---

<sup>2</sup> It should also be noted that the City of Long Beach Mobility Element identifies a grade separation at the “Iron Triangle,” which is the triangle configuration of the Pacific Coast Highway/7th Street/Bellflower Boulevard intersections. This would include the closure of Bellflower Boulevard Southbound to simplify movements. This project grade separation would reduce congestion at the “Iron Triangle” but is still in the conceptual phase.




Figure 5.16-5 - Feasibility of Intersection Improvements  
5. Environmental Analysis




#3 Studebaker Road & SR-22  
Westbound Ramps (Caltrans)



#4 Ximeno Avenue & 7th Street

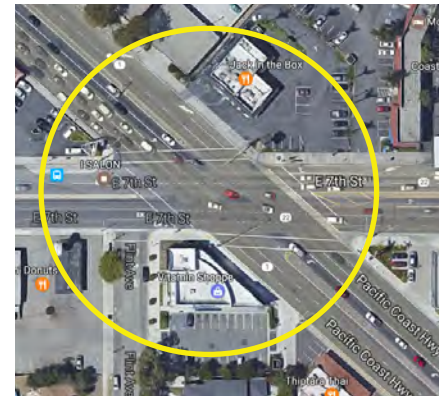


#5 Pacific Coast Highway & 7th  
Street (Caltrans)

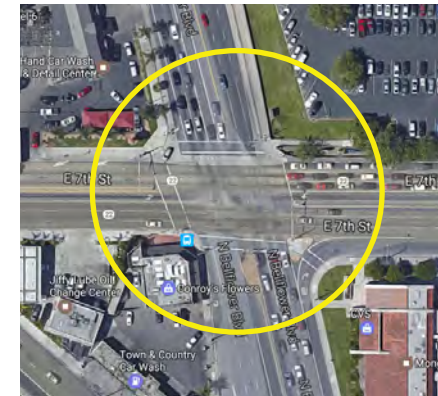

#6 Bellflower Boulevard & 7th Street  
(Caltrans)



#7 Channel Drive & 7th Street  
(Caltrans)

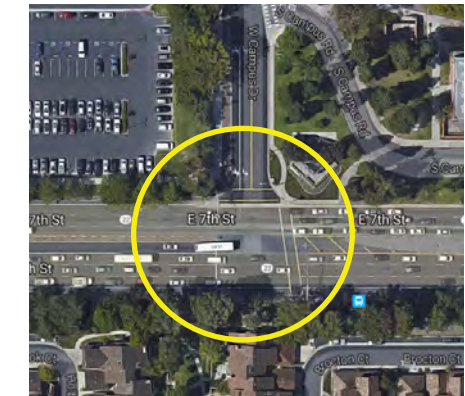


#8 Campus Drive & 7th Street  
(Caltrans)




#11 Studebaker Road & SR-22  
Eastbound Ramps (Caltrans)




#12 Pacific Coast Hwy & Loynes  
Drive (Caltrans)

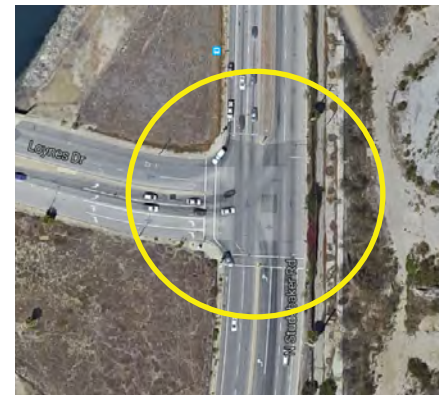

#13 Studebaker Road & Loynes  
Drive

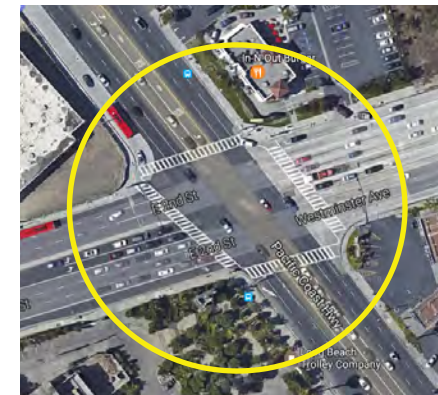

#16 Pacific Coast Highway & 2nd  
Street (Caltrans)

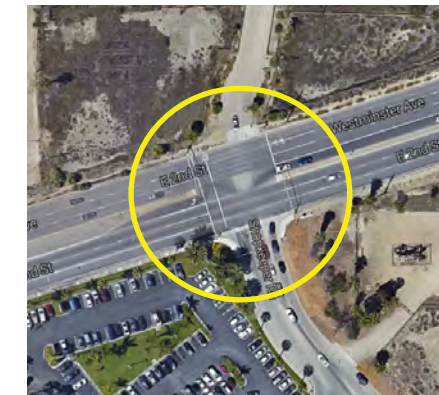


#17 Shopkeeper Road & 2nd Street



#18 Studebaker Road & 2nd Street



#19 Seal Beach Blvd. & 2nd/  
Westminster (City of Seal Beach)

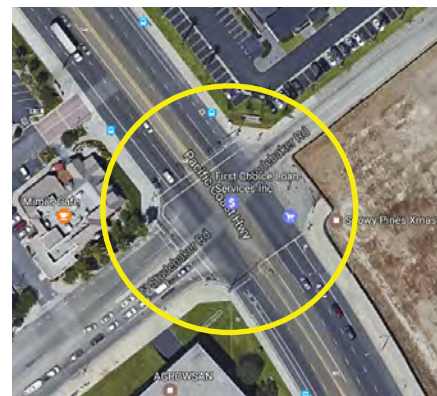

#20 Pacific Coast Highway and  
Studebaker Rd (Caltrans)



#22 PCH & Seal Beach Blvd  
(City of Seal Beach)



#26 7th Street & Park Avenue



#27 2nd Street & Bay Shore Avenue

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*This page intentionally left blank.*

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

- **16. Pacific Coast Highway & 2nd Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to pre-Project conditions during the AM and PM peak hours. These mitigations would require right-of-way dedication along Pacific Coast Highway and 2nd Street to accommodate the additional lanes, which would encroach onto existing buildings, and sidewalks. Additionally, the improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **17. Shopkeeper Road & 2nd Street:** With Mitigation Measure TRAF-3, operations are improved to an acceptable level of service during the PM peak hour. However, the improvements may impact adjacent wetlands in the coastal zone, which may require Coastal Commission approval. Therefore, the improvement cannot be guaranteed by the Project or the City of Long Beach. Mitigation Measure TRAF-3 has been adopted and will reduce this impact, but not to a less-than-significant level. The impact is considered *significant and unavoidable*.
- **19. Seal Beach Boulevard and 2nd Street/Westminster (City of Seal Beach):** With Mitigation Measure TRAF-4, operations are improved to an acceptable LOS D during the PM peak hour. These improvements would require right-of-way dedication along Seal Beach Boulevard and 2nd Street/Westminster Boulevard to accommodate the additional lanes. Sufficient right-of-way does exist along Seal Beach Boulevard and 2nd Street/Westminster Boulevard. However, depending upon the ultimate alignment and design, these improvements may encroach upon the adjacent wetlands within the coastal zone, require median modification, or require removal of an existing bicycle lane. Impacts to the wetlands would require approval of the Coastal Commission, which fall under the jurisdiction of another public agency (City of Seal Beach) and not the lead agency (City of Long Beach). The improvements require City of Seal Beach approval, since it is the owner/operator of this intersection. Therefore, the improvement cannot be guaranteed by the Project or the City of Long Beach. Mitigation Measure TRAF-4 has been adopted and will reduce this impact, but not to a less-than-significant level. The impact is considered *significant and unavoidable*.
- **26. 7th Street & Park Avenue (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to LOS D during the AM peak hour and LOS E during the PM peak hour; however, the V/C ratio is less than the Existing Condition scenario. These improvements would require right-of-way dedication along 7th Street. However, there is not sufficient right-of-way to implement these improvements, since it would encroach into the existing building located on the southwest

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

quadrant of the intersection. The mitigation is infeasible and the impact is considered *significant and unavoidable*.

- **27. 2nd Street & Bay Shore Avenue:** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS C during the AM and PM peak hours. Mitigation for the signal improvements is also feasible, since sufficient right-of-way exists. Therefore, the impact is considered less than significant. This intersection requires mitigation at 20 percent of project trip generation.

### *Cumulative Year (2035) With Project Conditions*

- **3. Studebaker Road & SR-22 Westbound Ramps:** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS C during the AM and PM peak hours. Mitigation for the signal improvements is also feasible, since sufficient right-of-way exists.

However, both improvements are within the responsibility and jurisdiction of another public agency (Caltrans) and not the lead agency (City of Long Beach). The City cannot assure the construction of improvements to freeway ramps that may be needed to improve traffic flow. Thus, although TRAF-3 requires the project applicant to make fair share fee contributions to City to fund improvements to the freeway ramps in the Project study area there is no assurance that planned improvements will be constructed. Accordingly, the Project's contribution of traffic to previously identified, congested ramps under Existing plus Project and Cumulative Year 2035 With Project conditions would represent a significant and unavoidable cumulative impact. Mitigation Measure TRAF-3 has been adopted and will reduce this impact, but not to a less-than-significant level. The improvements require Caltrans approval, and therefore the impact is considered *significant and unavoidable*. The Specific Plan's contribution for this intersection is 12 percent.

- **4. Ximeno Avenue & 7th Street:** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the AM and PM peak hours. However, there is insufficient right-of-way to accommodate the additional lanes due to existing development on the south side of 7th Street. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **5. Pacific Coast Highway & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the AM and PM peak hours. These improvements would require right-of-way dedication along 7th Street and Pacific Coast Highway to accommodate the additional lanes. However, there is insufficient right-of-way due to current development. Additionally, the

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

improvements cannot be guaranteed by the project or the City of Long Beach, because these improvements would require the approval from Caltrans, who is the owner/operator of this intersection. Given the right-of-way constraint and the inability to guarantee implementation of the improvements, the mitigation is infeasible and the impact is considered *significant and unavoidable*.

- **6. Bellflower Boulevard & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS C during the PM peak hour. These improvements are not feasible because it would require right-of-way dedication that would encroach onto existing buildings and eliminate sidewalks to accommodate the additional lanes. Additionally, the improvements cannot be guaranteed by the project or the City of Long Beach since the improvements would require the approval from Caltrans, who is the owner/operator of this intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **7. Channel Drive & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the PM peak hour. These improvements would require right-of-way dedication that would eliminate sidewalks, and bus stops along 7th Street to accommodate the additional lanes. Additionally, the improvements cannot be guaranteed by the project or the City of Long Beach because the improvements would require approval from Caltrans, who is the owner/operator of this intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **8. Campus Drive & 7th Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J of this DEIR), operations are improved to an acceptable LOS C during the AM peak hours. This would require right-of-way dedication along 7th Street to accommodate the additional lanes. However, there is not sufficient right-of-way to implement these improvements, since it would encroach into Riviera Circle to the north and would encroach into single family houses that back 7th Street to the south. Additionally, the improvements cannot be guaranteed by the City of Long Beach, because these improvements would require the approval from Caltrans, who is the owner/operator of this intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **11. Studebaker Rd & SR-22 Eastbound Ramps (Caltrans):** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS C during the AM and PM peak hours. Mitigation for the signal timing optimization improvements is feasible, since signal timing updates are part of Caltrans standard maintenance activity. However, as stated above for the SR-

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

22 Westbound Ramps (#3), both improvement options are within the responsibility and jurisdiction of another public agency (Caltrans) and not in the control of the lead agency (City of Long Beach). Since the improvements require Caltrans approval there is no assurance that planned improvements will be constructed. Mitigation Measure TRAF-3 has been adopted and will reduce this impact, but not to a less-than-significant level. Therefore, the impact is considered *significant and unavoidable*. The Specific Plan's fair share contribution for this intersection is 60 percent.

- **12. Pacific Coast Highway & Loynes Drive (Caltrans):** With mitigation measures detailed in Section 12 of the TIA (Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the PM peak hour. These mitigations would require right-of-way dedication along Pacific Coast Highway and Loynes Drive to accommodate the additional lanes. This improvement would fall under the jurisdiction of other public agencies. First, the improvement would encroach upon the adjacent wetlands in the coastal zone, which would require California Coastal Commission approval. Additionally, the improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this intersection. Given these constraints (limited right-of-way, potential wetland constraints, and the inability to guarantee implementation of the improvements), the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **13. Studebaker Road & Loynes Drive:** With mitigation measures detailed in Section 12 of the TIA (Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the PM peak hour. However, these improvements would encroach upon the adjacent wetlands within the coastal zone which would require Coastal Commission approval. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **15. Marina Drive & 2nd Street:** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS D during the PM peak hour. These mitigations would require right-of-way dedication along 2nd Street to accommodate the additional lane and restriping of Marina Drive. Since the proposed redevelopment of SEASP is along 2nd Street, there is sufficient right-of-way. Therefore, the impact is considered less than significant. The Specific Plan's fair share contribution for this intersection is 37 percent.
- **16. Pacific Coast Highway & 2nd Street (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to pre-project conditions during the AM and PM peak hours. These mitigations would require right-of-way dedication along Pacific Coast Highway and 2nd Street to accommodate the additional lanes, which would encroach onto buildings, and sidewalk. Additionally, the

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

improvements cannot be guaranteed by the Project or the City of Long Beach because the improvement would require the approval from Caltrans, who is the owner/operator of this intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.

- **17. Shopkeeper Road & 2nd Street:** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS D during the PM peak hour. These improvements require additional right-of-way along 2nd Street and Shopkeeper Road to accommodate the additional lanes. However, the improvements may encroach upon the adjacent wetlands in the coastal zone, which would require Coastal Commission approval. The improvement cannot be guaranteed by the Project or the City of Long Beach. Mitigation Measure TRAF-3 has been adopted and will reduce this impact, but not to a less-than-significant level. Therefore, the impact is considered *significant and unavoidable*. The Specific Plan's fair share contribution is 16 percent.
- **18. Studebaker Road & 2nd Street:** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS D during the PM peak hour. These mitigations would require right-of-way dedication along Studebaker Road and 2nd Street/Westminster Boulevard to accommodate the additional lanes. These improvements would encroach upon the adjacent wetlands in the coastal zone, which would require Coastal Commission approval. The improvement cannot be guaranteed by the Project or the City of Long Beach. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **19. Seal Beach Boulevard & 2nd St/Westminster Boulevard (City of Seal Beach):** With Mitigation Measure TRAF-4, operations are improved to an acceptable LOS D during the PM peak hour. These improvements would require right-of-way dedication along Seal Beach Boulevard and 2nd Street/Westminster Boulevard to accommodate the additional lanes. Sufficient right-of-way does exist along Seal Beach Boulevard and 2nd Street/Westminster Boulevard. However, depending upon the ultimate alignment and design, these improvements may encroach upon the adjacent wetlands within the coastal zone, require median modification, or require removal of an existing bicycle lane. Impacts to the wetlands would require approval of the Coastal Commission, which fall under the jurisdiction of another public agency. Additionally, the improvements require City of Seal Beach approval, since it is the owner/operator of this intersection. Therefore, the improvement cannot be guaranteed by the Project or the City of Long Beach. Mitigation Measure TRAF-4 has been adopted and will reduce this impact, but not to a less-than-significant level. The impact is considered *significant and unavoidable*. The Specific Plan's fair share contribution is 23 percent.

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

- **20. Pacific Coast Highway & Studebaker Road (Caltrans):** With Mitigation Measure TRAF-3, operations are improved to an acceptable LOS C during the PM peak hours. However, the improvements cannot be guaranteed by the Project or the City of Long Beach, because these improvements would require the approval from Caltrans, who is the owner/operator of this intersection. . Therefore, the impact is considered *significant and unavoidable*. The Specific Plan's fair share contribution is 12 percent.
- **22. Pacific Coast Highway & Seal Beach Boulevard (City of Seal Beach):** With Mitigation Measure TRAF-4, operations are improved to an acceptable LOS. However, the improvements cannot be guaranteed by the Project or the City of Long Beach, because these improvements would require the approval from Caltrans, who is the owner/operator of this intersection, and the intersection is in the City of Seal Beach. Therefore, the impact is considered *significant and unavoidable*. The Specific Plan's fair share contribution is 25 percent.
- **26. 7th Street & Park Avenue (Caltrans):** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS. These improvements would require right-of-way dedication along 7th Street and Park Avenue, which encroaches onto existing buildings on the southwest quadrant of the intersection and an existing park. The mitigation is infeasible and the impact is considered *significant and unavoidable*.
- **27. 2nd Street & Bay Shore Avenue:** With mitigation measures detailed in Table 5.16-20 (see Section 12 of the TIA; Appendix J1 of this DEIR), operations are improved to an acceptable LOS. However, the improvements would require right-of-way dedication along Bay Shore Avenue where insufficient space exists due to existing buildings located along both sides of Bay Shore Avenue south of the intersection. Therefore, the mitigation is infeasible and the impact is considered *significant and unavoidable*.

### *Construction Impacts*

Mitigation Measure TRAF-5 would substantially reduce potential impacts associated with construction impacts. However, depending on the timing, schedule, and equipment required for construction, impacts could occur at Project area intersections. For the reasons stated above under the Existing With Project and Cumulative 2035 With Project impacts, construction impacts would be a temporary significant and unavoidable impact.

### **Impact 5.16-2**

Many of the freeway segments will operate at an unacceptable level, and the project adds traffic to these facilities. Therefore, there are project-level impacts and cumulative impacts to the freeway



5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

system near the project site. To mitigate the impacts at the identified locations, freeway main-line widening or freeway ramp widening would be required.

However, this type of infrastructure is extremely costly and is typically infeasible for one development project to undertake. The City cannot assure the construction of improvements to freeway facilities that may be needed to improve traffic flow. Furthermore, Caltrans does not have any funding mechanism in place to allow development projects to contribute a fair-share payment to contribute to future improvements and off-set cumulatively considerable traffic impacts. Thus, although TRAF-6 provides a mechanism for project applicants to contribute fair share fees to Caltrans to fund improvements to the freeway ramps in the Project study area, there is no assurance that Caltrans will perform the necessary studies or that improvements will actually be constructed. Accordingly, the Project's contribution of traffic to previously identified, congested ramps under Existing plus Project and Cumulative Year 2035 With Project conditions would represent a significant and unavoidable cumulative impact. Mitigation Measure TRAF-6 has been adopted and will reduce this impact, but not to a less-than-significant level. The facility is not controlled by the City, which could not guarantee implementation of the mitigation measures. Therefore, the identified impacts to the freeway system are considered *significant and unavoidable*.

Improvements to state highway facilities are planned, funded, and constructed by the State of California through a legislative and political process involving the state legislature; the California Transportation Commission (CTC); the California Business, Transportation, and Housing Agency; Caltrans; and the Regional Transportation Planning Agency (RTPA). Although potential impacts to the freeway mainline segments and ramps have been evaluated, implementation of the transportation improvements to Caltrans facilities listed above is the primary responsibility of Caltrans. Caltrans has recognized that private development has a role to play in funding fair share improvements to impacts on these facilities, but neither Caltrans nor the state has adopted a program that can ensure that locally contributed impact fees will be tied to improvements to freeway mainlines, and only Caltrans has jurisdiction over mainline improvements. Because Caltrans has exclusive control over state highway improvements, ensuring that developer fair share contributions to mainline improvements are actually part of a program tied to implementation of mitigation is within the jurisdiction of Caltrans. However, a number of programs are in place in Los Angeles County to improve and upgrade the regional transportation system. These include the State Transportation Improvement Program (STIP), Regional Transportation Improvement Program (RTIP), Interregional Improvement Program (IIP), and Caltrans Traffic Operations Strategies, State Highway Operation and Protection Program (SHOPP). State and federal fuel taxes generate most of the funds used to pay for these improvements. Funds expected to be available for transportation improvements are identified through a fund estimate prepared by Caltrans and adopted by the CTC. These funds, along with other fund sources, are deposited in the state highway account to be programmed and allocated to specific project improvements in both the STIP and SHOPP by the

## 5. Environmental Analysis TRANSPORTATION AND TRAFFIC

CTC. However, if these programs are not implemented by the agencies with the responsibility to do so, the project's freeway ramp and mainline impacts would remain significant and unmitigated.

### Impact 5.16-3

With mitigation measures detailed in Section 8 of the TIA (Appendix J1 of this DEIR), operations are improved to an acceptable LOS E at CMP intersections—PCH at 7th Street and at 2nd Street. However, there is insufficient right-of-way along 2nd Street and Pacific Coast Highway due to existing development. Additionally, this intersections falls under the jurisdiction of another public agency (Caltrans), not the lead agency (City of Long Beach). The improvements require Caltrans approval, and therefore the impact is considered *significant and unavoidable*.

Since both intersections exceed the minimum standard of LOS E and no feasible mitigation is available, the CMP requires a deficiency plan. As discussed above, this plan includes improvement measures to implement at the intersection or TDM techniques that would decrease the reliance on a single-occupant vehicle. These techniques are outlined in the TDM strategies in Chapter 6 of the Specific Plan. See also Appendix J2 of this DEIR.

### 5.16.9 References

California Department of Transportation (Caltrans). 2002, December. "Guide for the Preparation of Traffic Impact Studies."

[http://www.dot.ca.gov/hq/tpp/offices/ocp/igr\\_ceqa\\_files/tisguide.pdf](http://www.dot.ca.gov/hq/tpp/offices/ocp/igr_ceqa_files/tisguide.pdf).

California State University Long Beach (CSULB). 2016b, February 24. Ride the Bus to Campus.

<https://daf.csulb.edu/offices/ppfm/parking/program/rideshare/bus.html>.

Fehr & Peers. 2014, March. Long Beach Southeast Area Development and Improvement Plan (SEADIP) Multimodal Existing Conditions, Constraints, and Opportunities Assessment.

———. 2017a, February. Final Long Beach Southeast Area Specific Plan Transportation Impact Analysis.

———. 2017b, February 14. Technical Memorandum: Vehicle Miles Traveled (VMT) for the SEASP Project.

———. 2017c, January 31. Technical Memorandum: Long Beach Southeast Area Specific Plan Transportation Demand Management Plan.

Governor's Office of Planning and Research (OPR). 2010. Update to the General Plan Guidelines: Complete Streets and the Circulation Element. State of California.

[http://opr.ca.gov/docs/Update\\_GP\\_Guidelines\\_Complete\\_Streets.pdf](http://opr.ca.gov/docs/Update_GP_Guidelines_Complete_Streets.pdf).

5. Environmental Analysis  
**TRANSPORTATION AND TRAFFIC**

Long Beach Department of Development Services and Department of Public Works, City of Long Beach. 2013, October. Long Beach General Plan Mobility Element.

Los Angeles County Metropolitan Transportation Authority (Metro). 2010. 2010 Congestion Management Program. [http://media.metro.net/docs/cmp\\_final\\_2010.pdf](http://media.metro.net/docs/cmp_final_2010.pdf).

Soto, Melissa (campus planner). 2016, February 5. Written response to service questionnaire. Office of Physical Planning. California State University, Long Beach.

5. Environmental Analysis  
TRANSPORTATION AND TRAFFIC

*This page intentionally left blank.*